

Tehničke karakteristike artikla: NLOMCS009M

Panik svetiljka OM OLED 230V AC/DC ML jednostrana plafonska

Incl. standard pictogram set, with integrated adjustable ceiling short pendant, convertible to wall bracket mounting, with single luminaire supervision and mixed operation; viewing distance: 20m



Tehnički podaci

Neto dužina (mm)	222,00
Neto visina (mm)	127,00
Neto dubina (mm)	40,00
Neto težina (kg)	0,20
Vrsta svetiljke (prema načinu primene)	anti-panik svetiljka
VB-CPS	Za centralni panik uređaj (CPS)
Funkcija	S nadzorom - centralno ON/OFF
Verzija	Pljosnate svjetiljke
Dizajn	OM
Bezhalogeni	Plastično kućište, bez halogena
Opis boje	Eloksirani aluminijum
Područje prepoznavanja/domet (m)	20
Izvor svetla	OLED
Područje napona (V)	230V AC 50Hz ±20%; 230V DC ±20%
IP stepen zaštite	IP20
Način montaže	Visilica ugradna
Min. temperatura okoline (°C)	0
Maks. temperatura okoline (°C)	40
AA Klasa E 8101	AA5

Dimensions (mm)

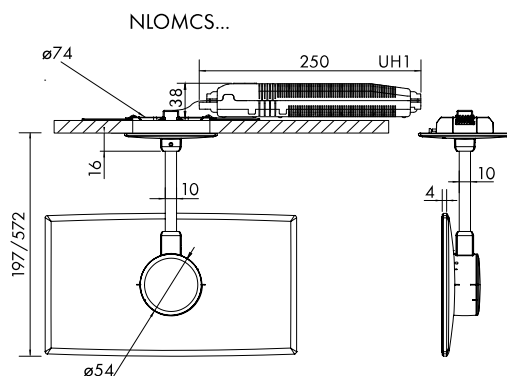


Tabela artikla

OPIS	Kat. broj
Panik svetiljka OM OLED 230V AC/DC ML jednostrana plafonska Incl. standard pictogram set, with integrated adjustable ceiling short pendant, convertible to wall bracket mounting, with single luminaire supervision and mixed operation; viewing distance: 20m	NLOMCS009M
Dodatni pribor	
Visilica za Design OM 500mm aluminijum, žičana can be shortened according to requirements	NLOM1PA