


Tehničke karakteristike artikla: NLOMRS009E

Protiv - panična svetiljka OM OLED AC/DC EL zidna ugradna

Incl. standard pictogram set, with supervision - centrally switchable; viewing distance: 20m




Tehnički podaci

Neto dužina (mm)	222,00
Neto visina (mm)	127,00
Neto dubina (mm)	10,00
Neto težina (kg)	0,12
Vrsta svetiljke (prema načinu primene)	anti-panik svetiljka
VB-CPS	Za centralni panik uređaj (CPS)
Funkcija	sa nadzorom - centralno ON/OFF
Verzija	Pljosnate svjetiljke
Dizajn	OM
Bezhalogeni	Bez halogeno plastično kućište
Opis boje	RAL 7035 (siva)
Pictogram	Slide-in pictogram set (arrow left, right, bottom, top) included in accordance with ISO 7010
Područje prepoznavanja/domet (m)	20
Izvor svetla	OLED
Opseg napona (V)	230V AC 50Hz ±20%; 230V DC ±20%
Power maintained mode (W)	4
Power non-maintained mode (W)	1, 10
Power max. (W)	4
IP stepen zaštite	IP20
Otpornost na udar	≥ IK03
Način montaže	Zidno ugradno

Tehnički podaci - nastavak

Min. temperatura okoline (°C)	0
Maks. temperatura okoline (°C)	40
AA Klasa E 8101	AA5
Proizvođač	Schrack

Dimensions (mm)

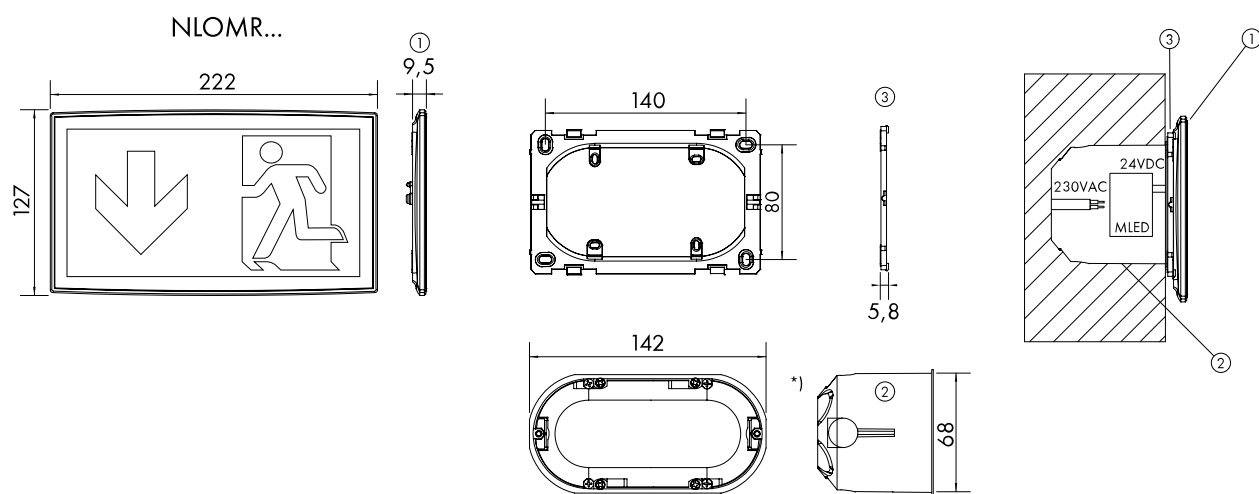

Protiv - panična svetiljka OM OLED AC/DC EL zidna ugradna

Incl. standard pictogram set, with supervision - centrally switchable; viewing distance: 20m

NLOMRS009E