

Tehničke karakteristike artikla: NLPMD039EL

Anti-panik svetiljka PM 4x1W ERT-LED 230V, plafonska montaža

Kombinovana svetiljka za obeležavanje i osvetljavanje puteva za evakuaciju, plafonska montaža, IP65




Tehnički podaci

Neto dužina (mm)	236,00
Neto širina (mm)	136,00
Neto visina (mm)	168,00
Neto težina (kg)	0,89
Vrsta svetiljke (prema načinu primene)	Kombinovana svetiljka sa piktogramom i osvetljenjem evakuacionog puta anti-panik svetiljka sigurnosna rasveta
VB-CPS	Za centralni panik uređaj (CPS)
Funkcija	sa nadzorom - centralno ON/OFF
Verzija	Plastične svetiljke
Dizajn	PM
Bezhalogeni	Bez halogeno plastično kućište

Tehnički podaci - nastavak

Opis boje	RAL 9003 (bela)
Piktogram	Slide-in pictogram set (2x man in the door and two arrows that can each be rotated by 90°) included in accordance with ISO 7010
Područje prepoznavanja/domet (m)	20
Izvor svetla	ERT-LED (4W)
Lumen	335
Opseg napona (V)	230V AC 50Hz ±20%; 230V DC ±20%
Power maintained mode (W)	5,20
Power non-maintained mode (W)	1,10
Power max. (W)	5,20
IP stepen zaštite	IP65
Otpornost na udar	IK06
Način montaže	Stropna ugradna opcija Plafonska nadgradna
Min. temperatura okoline (°C)	-20
Maks. temperatura okoline (°C)	40
AA Klasa E 8101	AA3 AA4 AA5
Proizvođač	Schrack

Dimensions (mm)

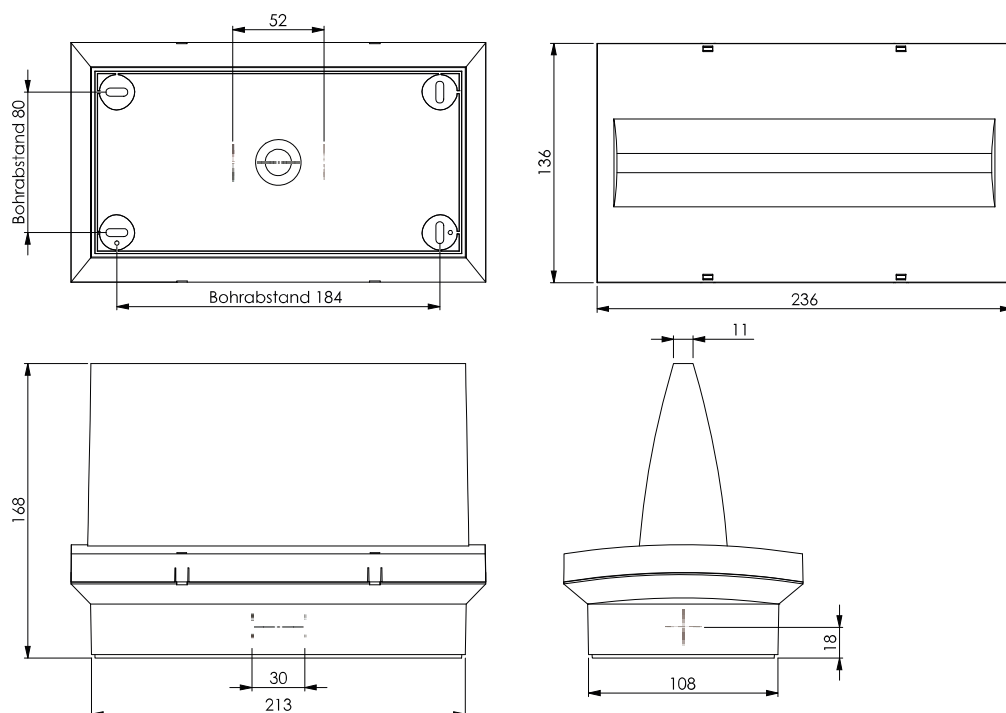

Spacing table with corridor lenses (included in scope delivery) - Min. illuminance on the center line +/- 0.5 m: 1 lx - Maintenance factor 0.80

					
2,00	5,8	13,26	10,58	7,88	3,04
2,50	6,54	15,39	11,93	8,47	3,23
3,00	6,94	17,3	13,12	8,92	3,39
3,50	6,94	18,85	13,95	9,29	3,5
4,00	5,02	19,73	14,24	9,56	3,56
5,00	3,76	18,43	11,99	9,99	3,58
6,00	2,05	13,71	10,88	10,16	3,5
7,00	1,68	10,99	9,01	10,2	3,22
8,00	1,46	6,75	8,13	10,1	1,97

Tabela artikla

OPIS	Kat. broj
Anti-panik svetiljka PM 4x1W ERT-LED 230V, plafonska montaža	NLPMD039EL
Kombinovana svetiljka za obeležavanje i osvetljavanje puteva za evakuaciju, plafonska montaža, IP65	
Dodatni pribor	
Ugradni okvir bele boje za anti-panik svetiljke dizajna PM	NLPME
Required ceiling cut out: 246 x 152 mm	