

Tehničke karakteristike artikla: NLPMW509CC

# Emergency luminaire PM HP-LED CC24 24V universal mounting

with supervision - centrally switchable, viewing distance: 20m




## Tehnički podaci

|                                        |                                                                                                                                 |
|----------------------------------------|---------------------------------------------------------------------------------------------------------------------------------|
| Neto dužina (mm)                       | 236,00                                                                                                                          |
| Neto širina (mm)                       | 136,00                                                                                                                          |
| Neto visina (mm)                       | 65,00                                                                                                                           |
| Neto težina (kg)                       | 0,70                                                                                                                            |
| Vrsta svetiljke (prema načinu primene) | anti-panik svetiljka                                                                                                            |
| VB-CPS                                 | Za centralni panik uređaj (CPS)                                                                                                 |
| Funkcija                               | 24V Core24 sa nadzorom - centralno prebacivanje                                                                                 |
| Verzija                                | Plastične svetiljke                                                                                                             |
| Dizajn                                 | PM                                                                                                                              |
| Bezhalogeni                            | Bez halogeno plastično kućište                                                                                                  |
| Opis boje                              | RAL 9003 (bela)                                                                                                                 |
| Pictogram                              | Slide-in pictogram set (2x man in the door and two arrows that can each be rotated by 90°) included in accordance with ISO 7010 |
| Područje prepoznavanja/domet (m)       | 20                                                                                                                              |

## Tehnički podaci - nastavak

|                                |                   |
|--------------------------------|-------------------|
| Izvor svetla                   | LED (3W)          |
| Opseg napona (V)               | 24V AC            |
| Power maintained mode (W)      | 2,80              |
| Power non-maintained mode (W)  | 0,40              |
| Power max. (W)                 | 2,80              |
| IP stepen zaštite              | IP65              |
| Otpornost na udar              | IK06              |
| Način montaže                  | Montaža na zid    |
| Min. temperatura okoline (°C)  | -20               |
| Maks. temperatura okoline (°C) | 40                |
| AA Klasa E 8101                | AA3<br>AA4<br>AA5 |
| Proizvođač                     | Schrack           |

## Abmessungen (mm)

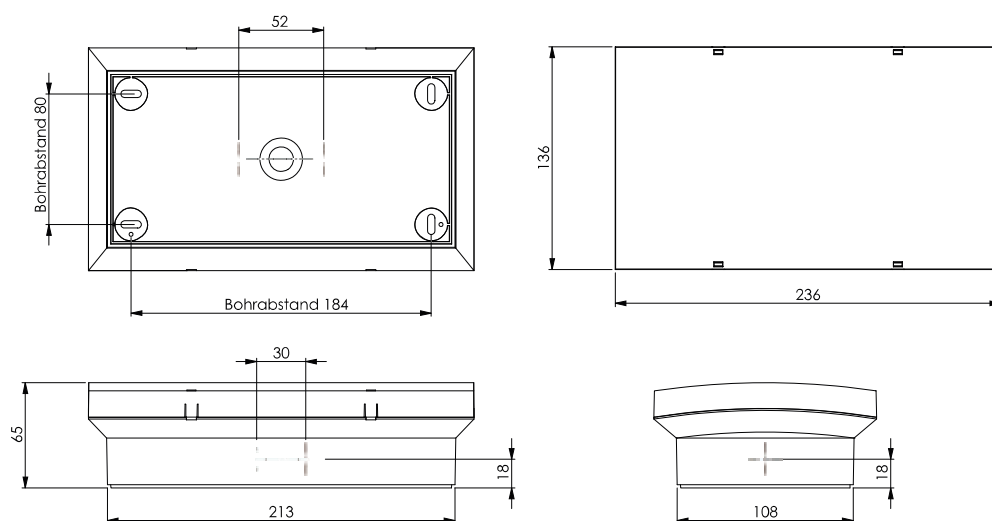

## Tabela artikla

| OPIS                                                                                                                        | Kat. broj  |
|-----------------------------------------------------------------------------------------------------------------------------|------------|
| Emergency luminaire PM HP-LED CC24 24V universal mounting<br>with supervision - centrally switchable, viewing distance: 20m | NLPMW509CC |
| <b>Dodatni pribor</b>                                                                                                       |            |
| Ugradni okvir bele boje za anti-panik svetiljke dizajna PM<br>Required ceiling cut out: 246 x 152 mm                        | NLPME      |