

Tehničke karakteristike artikla: NLPXD403WL

Panik svetiljka PX bežična HP-LED 3h 230V plafonska

Panik svetiljka PX bežična HP-LED 3h 230V plafonska



Tehnički podaci

Neto dužina (mm)	339,00
Neto širina (mm)	73,00
Neto visina (mm)	211,00
Neto težina (kg)	1,40
Vrsta svetiljke (prema načinu primene)	anti-panik svetiljka
VB-CPS	Sa sopstvenom baterijom
Funkcija	Wireless kontrola Professional
Verzija	Plastične svetiljke
Dizajn	PX
Bezhalogeni	Bez halogeno plastično kućište
Opis boje	RAL 9003 (bela)
Piktogram	Slide-in pictogram set (2x man in the door and two arrows that can each be rotated by 90°) included in accordance with ISO 7010
Područje prepoznavanja/domet (m)	30

Tehnički podaci - nastavak

Vreme autonomije (h)	3
Izvor svetla	LED (3W)
Lumen	320
Opseg napona (V)	230V AC 50Hz ±20%
Power maintained mode (W)	5,70
Power non-maintained mode (W)	2
Power max. (W)	6,90
Baterije (V/Ah)	2x 3,2V/3,3Ah LiFePO4
IP stepen zaštite	IP65
Otpornost na udar	IK06
Način montaže	Plafonska nadgradna
Min. temperatura okoline (°C)	0
Maks. temperatura okoline (°C)	40
AA Klasa E 8101	AA4
Proizvođač	Schrack

Dimensions (mm)

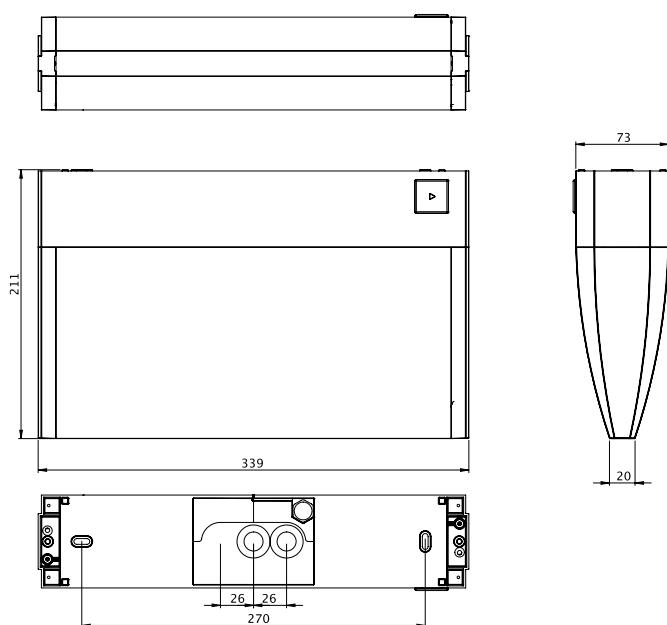


Tabela artikla

OPIS	Kat. broj
Panik svetiljka PX bežična HP-LED 3h 230V plafonska	NLPXD403WL
Panik svetiljka PX bežična HP-LED 3h 230V plafonska	
Dodatni pribor	
Set od 2 bat. 3.2V 3.3Ah LiFePO4 bež. Kontrol. Svet. sa LEO	NLAKKU323L
LifePO4 - Litijum metalna fosfatna baterija, UN3480- UN 3480: Litijum jonska baterija	
	NLTESTSC2
Zaštitni poklopac za test dugme NLTEST2	NLTEST2COV
39	