

Tehničke karakteristike artikla: NLPXD509CC

Emergency luminaire PX HP-LED CC24 24V, ceiling mounting

with supervision - centrally switchable, viewing distance: 30m




Tehnički podaci

Neto dužina (mm)	339,00
Neto širina (mm)	73,00
Neto visina (mm)	211,00
Neto težina (kg)	1,37
Vrsta svetiljke (prema načinu primene)	anti-panik svetiljka
VB-CPS	Za centralni panik uređaj (CPS)
Funkcija	24V Core24 sa nadzorom - centralno prebacivanje
Verzija	Plastične svetiljke
Dizajn	PX
Bezhalogeni	Bez halogeno plastično kućište
Opis boje	bela
Pictogram	Slide-in pictogram set (2x man in the door and two arrows that can each be rotated by 90°) included in accordance with ISO 7010
Područje prepoznavanja/domet (m)	30

Tehnički podaci - nastavak

Izvor svetla	LED (3W)
Lumen	335
Opseg napona (V)	24V AC
Power maintained mode (W)	5,20
Power non-maintained mode (W)	1,10
Power max. (W)	5,20
IP stepen zaštite	IP65
Otpornost na udar	IK06
Način montaže	Plafonska nadgradna
Min. temperatura okoline (°C)	-20
Maks. temperatura okoline (°C)	50
AA Klasa E 8101	AA4
Proizvođač	Schrack

Abmessungen (mm)

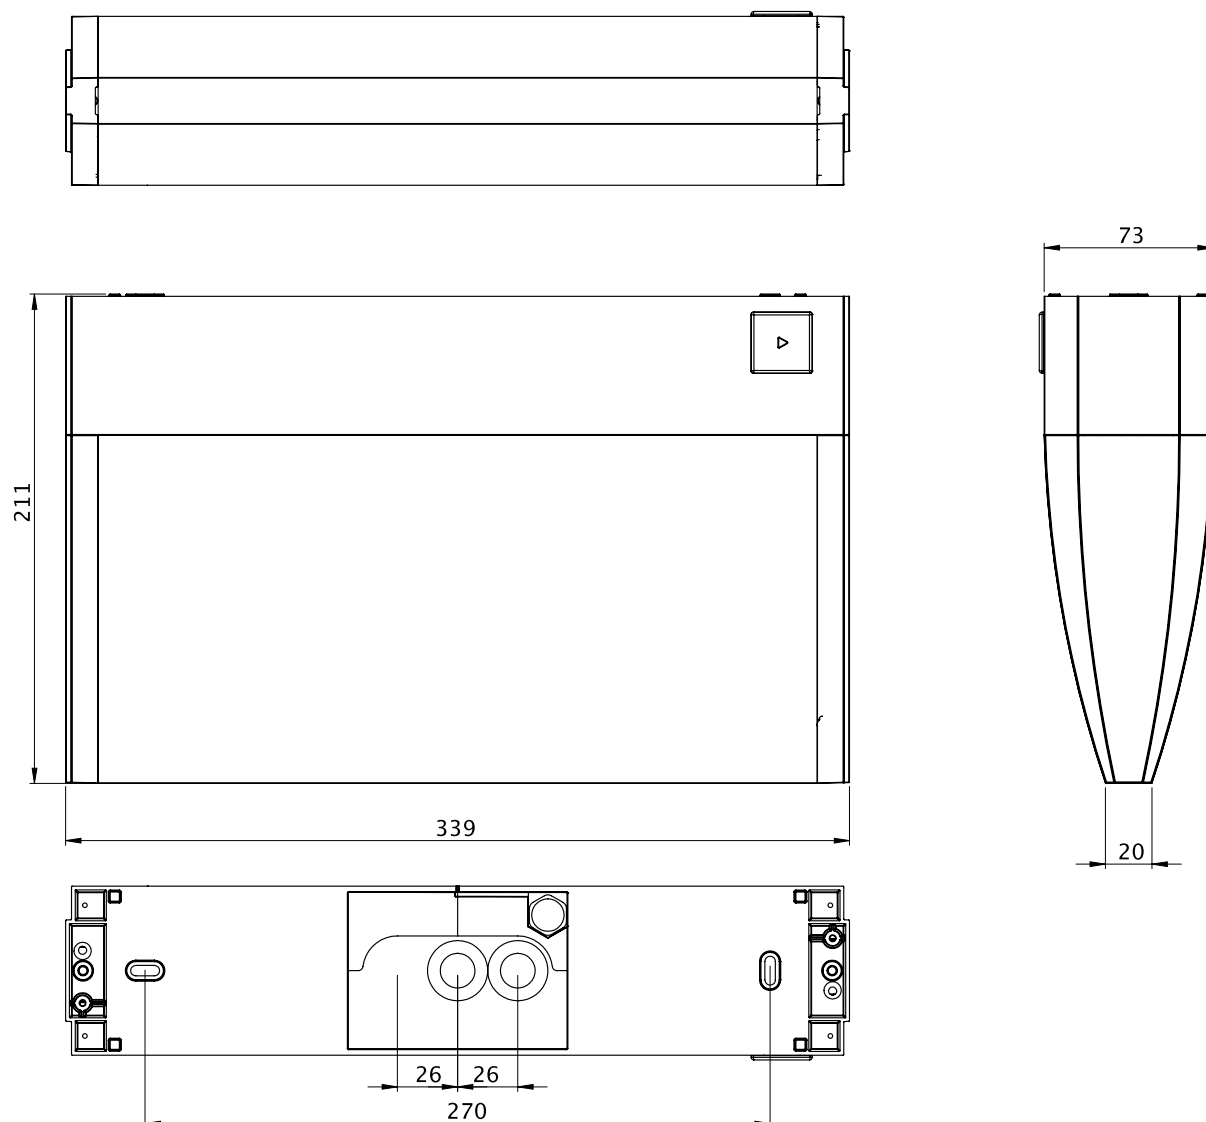

OPIS

Emergency luminaire PX HP-LED CC24 24V, ceiling mounting
with supervision - centrally switchable, viewing distance: 30m

Kat. broj

NLPXD509CC