


Tehničke karakteristike artikla: NLWAFA29EL

Protivpanična svetiljka WEF antra.ERT-LED 3x1W 230V AC/DC EL

zidna montaža, s nadzorom - centralno uključivanje i isključivanje



Tehnički podaci


Neto dužina (mm)	193,00
Neto visina (mm)	115,00
Neto dubina (mm)	53,00
Neto težina (kg)	0,37
Vrsta svetiljke (prema načinu primene)	sigurnosna rasveta
VB-CPS	Za centralni panik uređaj (CPS)
Funkcija	sa nadzorom - centralno ON/OFF
Verzija	Metalna svetiljka
Dizajn	WAF
Opis boje	RAL 7016 (antracit)
Izvor svetla	ERT-LED (3W)
Lumen	420
Opseg napona (V)	230V AC 50Hz ±20%; 230V DC ±20%
Power maintained mode (W)	4,50
Power non-maintained mode (W)	1,10
Power max. (W)	4,50
IP stepen zaštite	IP20
Otpornost na udar	IK04
Način montaže	Montaža na zid
Min. temperatura okoline (°C)	-10
Maks. temperatura okoline (°C)	40
AA Klasa E 8101	AA4

Tehnički podaci - nastavak


Proizvođač

Schrack


Dimensions (mm)

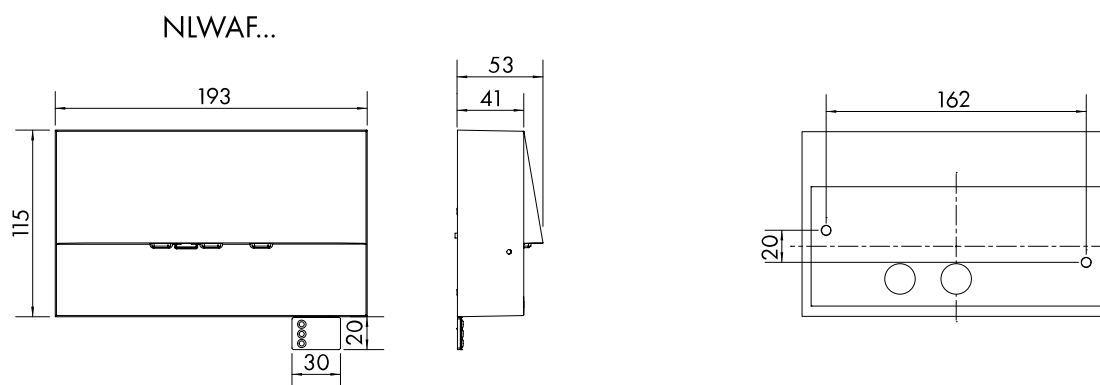

Floor plan illumination for wall mounting with mounting height 2,0m, maintenance factor 0,8

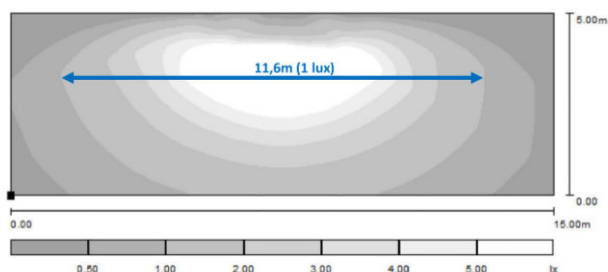

Floor plan illumination for wall mounting with mounting height 0,5m, maintenance factor 0,8

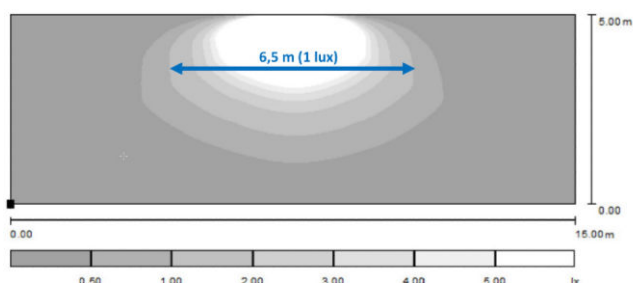

OPIS

Kat. broj

Protivpanična svetiljka WEF antra.ERT-LED 3x1 W 230V AC/DC EL
zidna montaža, s nadzorom - centralno uključivanje i isključivanje

NLWAF29EL