


Tehničke karakteristike artikla: NLWAFE29EL

Protivp. zidna svet. WAF izgled INOX 3x1W ERT-LED 3h 230VAC

Wall surface mounting, with supervision - centrally switchable, 420lm

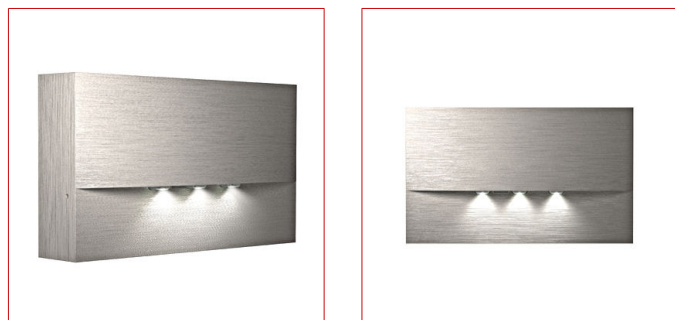

Tehnički podaci


Neto dužina (mm)	193,00
Neto visina (mm)	115,00
Neto dubina (mm)	53,00
Neto težina (kg)	0,37
Vrsta svetiljke (prema načinu primene)	sigurnosna rasveta
VB-CPS	Za centralni panik uređaj (CPS)
Funkcija	sa nadzorom - centralno ON/OFF
Verzija	Metalna svetiljka
Dizajn	WAF
Opis boje	Izgled nerđajućeg čelika
Izvor svetla	ERT-LED (3W)
Lumen	420
Opseg napona (V)	230V AC 50Hz ±20%; 230V DC ±20%
Power maintained mode (W)	4,50
Power non-maintained mode (W)	1,10
Power max. (W)	4,50
IP stepen zaštite	IP20
Otpornost na udar	IK04
Način montaže	Montaža na zid
Min. temperatura okoline (°C)	-20
Maks. temperatura okoline (°C)	40
AA Klasa E 8101	AA4

Tehnički podaci - nastavak


Proizvođač

Schrack


Dimensions (mm)

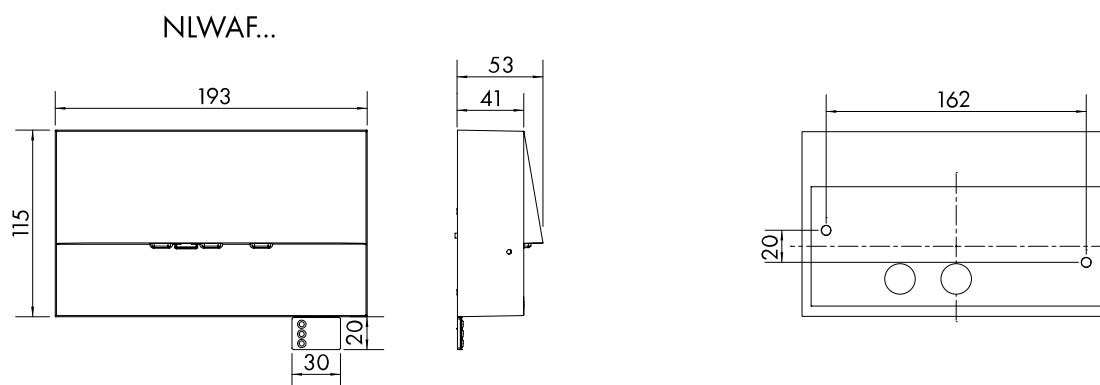

Floor plan illumination for wall mounting with mounting height 2,0m, maintenance factor 0,8

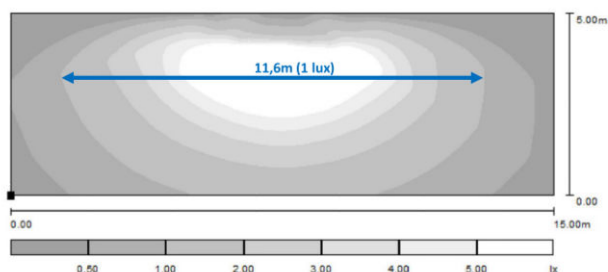

Floor plan illumination for wall mounting with mounting height 0,5m, maintenance factor 0,8

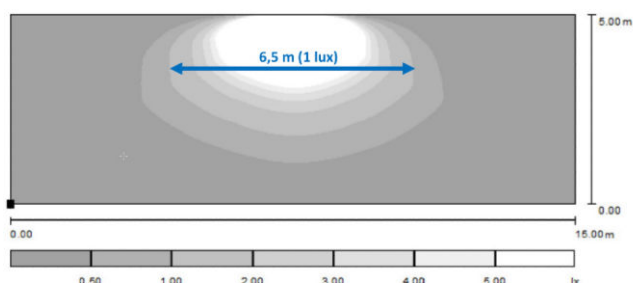

Protivp. zidna svet. WAF izgled INOX 3x1W ERT-LED 3h 230VAC
Wall surface mounting, with supervision - centrally switchable, 420lm

NLWAFE29EL