

Tehničke karakteristike artikla: NLZAA003WL

# Samostalna svetiljka ZAA Wireless LED 3h 230VAC zidna

Zinc die-cast, anthracite, IP65, -5° up to 40°C, 4 x HP LED 0,5W, with LiFePO4 battery, batteries inside the luminaire, central switching, wall mounting, WirelessControl Professional type




## Tehnički podaci

|                                        |                                |
|----------------------------------------|--------------------------------|
| Neto dužina (mm)                       | 315,00                         |
| Neto visina (mm)                       | 140,00                         |
| Neto dubina (mm)                       | 65,00                          |
| Neto težina (kg)                       | 2,20                           |
| Vrsta svetiljke (prema načinu primene) | sigurnosna rasveta             |
| VB-CPS                                 | Sa sopstvenom baterijom        |
| Funkcija                               | Wireless kontrola Professional |
| Verzija                                | Metalna svetiljka              |
| Dizajn                                 | ZA                             |
| Opis boje                              | antracit                       |
| Vreme autonomije (h)                   | 3                              |
| Izvor svetla                           | LED (2W)                       |
| Lumen                                  | 170                            |
| Opseg napona (V)                       | 230V AC 50Hz ±20%              |
| Power maintained mode (W)              | 3,90                           |
| Power non-maintained mode (W)          | 1,50                           |
| Power max. (W)                         | 5,30                           |
| Baterije (V/Ah)                        | 3,2/3,0 LiFePO4                |
| IP stepen zaštite                      | IP65                           |
| Otpornost na udar                      | IK08                           |


## Tehnički podaci - nastavak

|                                |                |
|--------------------------------|----------------|
| Način montaže                  | Montaža na zid |
| Min. temperatura okoline (°C)  | -5             |
| Maks. temperatura okoline (°C) | 40             |
| AA Klasa E 8101                | AA4            |
| Proizvođač                     | Schrack        |

## Dimensions (mm)

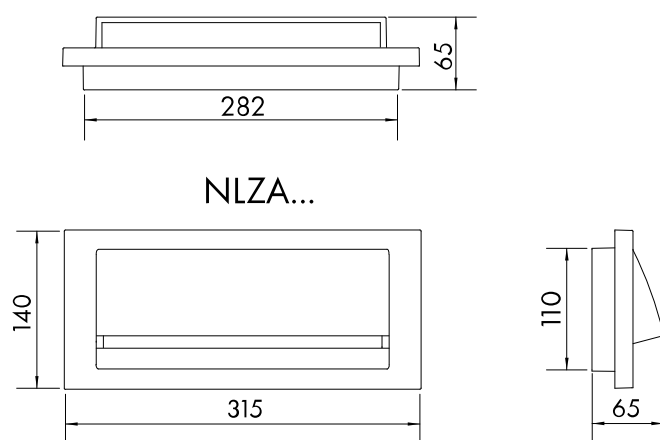

## Drilling distances (mm)

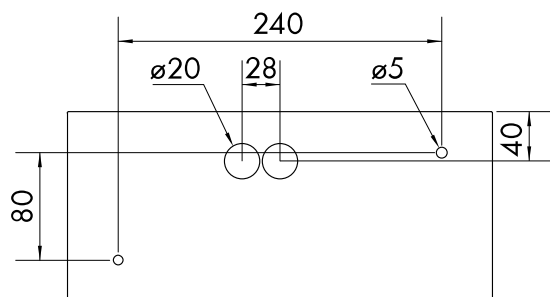

## Abstandstabelle - Min. Beleuchtungsstärke auf der Mittellinie +/- 0,5m: 1lx - Wartungsfaktor 0,8, 3h Autonomiezeit

|  |  |  |  |  |  |
|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| 2,00                                                                              | 0,21                                                                              | 3,13                                                                              | 0,58                                                                              | 9,43                                                                                | 3,89                                                                                |
| 2,50                                                                              | 0,18                                                                              | 3,34                                                                              | 0,58                                                                              | 10,51                                                                               | 4,14                                                                                |
| 3,00                                                                              | 0,16                                                                              | 3,44                                                                              | 0,57                                                                              | 11,28                                                                               | 3,18                                                                                |
| 3,50                                                                              | 0,11                                                                              | 3,47                                                                              | 0,55                                                                              | 11,3                                                                                | 2,79                                                                                |
| 4,00                                                                              | 0,03                                                                              | 3,45                                                                              | 0,53                                                                              | 10,71                                                                               | 1,97                                                                                |

## Tabela artikla

| OPIS                                                                                                                                                                                                                                                 | Kat. broj  |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|
| Samostalna svetiljka ZAA Wireless LED 3h 230VAC zidna<br>Zinc die-cast, anthracite, IP65, -5° up to 40°C, 4 x HP LED 0,5W, with LiFePO4 battery, batteries inside the luminaire, central switching, wall mounting, WirelessControl Professional type | NLZAA003WL |
| <b>Dodatni pribor</b>                                                                                                                                                                                                                                |            |
| Bat. 3,2V 3,0Ah LiFePO4 za samodrž. LED svet. KSC,KMB i ZAW<br>LiFePO4 baterija, UN3480 - Li-Ion baterije, kompatibilne s aku 3,2V 3,3Ah                                                                                                             | NLAKKU3230 |