

Tehničke karakteristike artikla: NLZAA509CC

Emergency luminaire ZAA 4x0,5W LED CC24 24V wall mounting

Zinc die-cast, colour anthracite, IP65, -30° up to 40°C, 4 x HP-LED 0,5W, with supervision - centrally switchable, 220lm




Tehnički podaci

Neto dužina (mm)	315,00
Neto visina (mm)	140,00
Neto dubina (mm)	65,00
Neto težina (kg)	2,20
Vrsta svetiljke (prema načinu primene)	sigurnosna rasveta
VB-CPS	Za centralni panik uređaj (CPS)
Funkcija	24V Core24 sa nadzorom - centralno prebacivanje
Verzija	Metalna svetiljka
Dizajn	ZA
Opis boje	RAL 7016 (antracit)
Izvor svetla	LED (2W)
Lumen	220
Opseg napona (V)	24V AC

Tehnički podaci - nastavak

Power maintained mode (W)	2,10
Power non-maintained mode (W)	0,40
Power max. (W)	2,10
IP stepen zaštite	IP65
Otpornost na udar	IK08
Način montaže	Montaža na zid
Min. temperatura okoline (°C)	-30
Maks. temperatura okoline (°C)	40
AA Klasa E 8101	AA3 AA4 AA5
Proizvođač	Schrack

Abmessungen (mm)

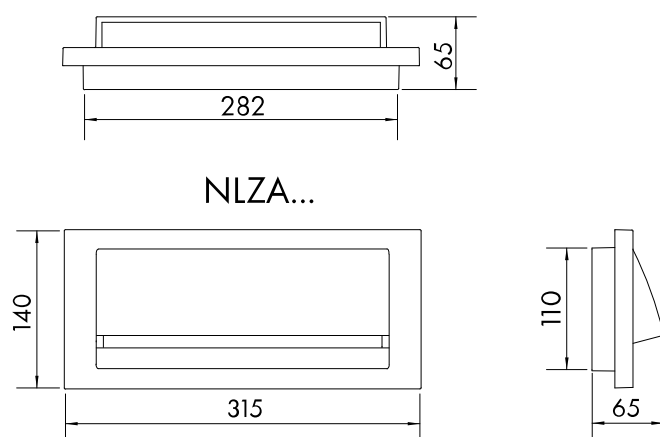

Bohrabstände (mm)



Abstandstabelle - Min. Beleuchtungsstärke auf der Mittellinie +/- 0,5m: 1lx - Wartungsfaktor 0,80

					
2,00	0,27	3,3	0,59	9,77	4,07
2,50	0,2	3,51	0,58	10,94	4,42
3,00	0,19	3,66	0,58	11,91	4,27
3,50	0,15	3,74	0,56	12,73	3,16
4,00	0,09	3,72	0,55	11,96	2,82

OPIS

Kat. broj

Emergency luminaire ZAA 4x0,5W LED CC24 24V wall mounting

NLZAA509CC

Zinc die-cast, colour anthracite, IP65, -30° up to 40°C, 4 x HP-LED 0,5W, with supervision - centrally switchable, 220lm