

Tehničke karakteristike artikla: NLZAAC03SC

Samostalna svetiljka ZAA Wireless LED

3h/8h 230VAC zidna

Zinc die-cast, anthracite, IP65, -25° up to 40°C, 4 x HP LED 0,5W, with LiFePO4 battery, batteries in external housing to be mounted outside the cold area, wall mounting



Tehnički podaci

Neto dužina (mm)	315,00
Neto visina (mm)	140,00
Neto dubina (mm)	65,00
Neto težina (kg)	2,20
Vrsta svetiljke (prema načinu primene)	sigurnosna rasveta
VB-CPS	Sa sopstvenom baterijom
Funkcija	Samokontrola niske temperature
Verzija	Metalna svetiljka
Dizajn	ZA
Opis boje	antracit
Vreme autonomije (h)	3
Izvor svetla	LED (2W)
Lumen	1h: 170;3h: 170;8h: 76
Opseg napona (V)	230V AC 50Hz ±20%
Baterije (V/Ah)	3,2/3,0 LiFePO4
IP stepen zaštite	IP65
Način montaže	Montaža na zid
Min. temperatura okoline (°C)	-25
Maks. temperatura okoline (°C)	40

Tehnički podaci - nastavak

AA Klasa E 8101

AA3

AA4

AA5


Proizvođač

Schrack

Dimensions (mm)



Drilling distances (mm)

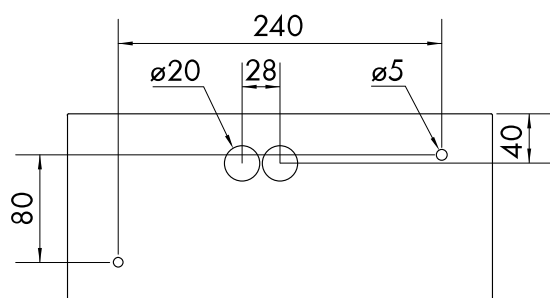

Housing IP54 for COOL-version (mm)



Abstandstabelle - Min. Beleuchtungsstärke auf der Mittellinie +/- 0,5m: 1lx - Wartungsfaktor 0,80, 1h/3h Autonomiezeit

					
2,00	0,21	3,13	0,58	9,43	3,89
2,50	0,18	3,34	0,58	10,51	4,14
3,00	0,16	3,44	0,57	11,28	3,18
3,50	0,11	3,47	0,55	11,3	2,79
4,00	0,03	3,45	0,53	10,71	1,97

Tabela artikla

OPIS	Kat. broj
Samostalna svetiljka ZAA Wireless LED 3h/8h 230VAC zidna Zinc die-cast, anthracite, IP65, -25° up to 40°C, 4 x HP LED 0,5W, with LiFePO4 battery, batteries in external housing to be mounted outside the cold area, wall mounting	NLZAAC03SC
Dodatni pribor	
Bat. 3,2V 3,0Ah LiFePO4 za samodrž. LED svet. KSC,KMB i ZAW LiFePO4 baterija, UN3480 - Li-Ion baterije, kompatibilne s aku 3,2V 3,3Ah	NLAKKU3230