

Tehničke karakteristike artikla: NLZAAC08WB

Emerg.lum.ZA 4x0,5W HighPower LED 8h 230V AC WirelessConnect

Wall surface mounting, with LiFePO4 battery, battery in external housing for mounting outside the cold area, emergency luminaire for illuminating round surfaces, with Bluetooth communication




Tehnički podaci

Neto dužina (mm)	315,00
Neto visina (mm)	140,00
Neto dubina (mm)	65,00
Neto težina (kg)	2,20
Vrsta svetiljke (prema načinu primene)	sigurnosna rasveta
VB-CPS	Sa sopstvenom baterijom
Funkcija	WirelessConnect Cool Version
Verzija	Metalna svetiljka
Dizajn	ZA
Opis boje	antracit
Vreme autonomije (h)	8
Izvor svetla	LED (2W)


Tehnički podaci - nastavak

Lumen	76
Područje napona (V)	230V AC 50Hz ±20%
Baterije (V/Ah)	3,2/3,3 LiFePO4
IP stepen zaštite	IP65
Način montaže	Montaža na zid
Min. temperatura okoline (°C)	-25
Maks. temperatura okoline (°C)	40
AA Klasa E 8101	AA3 AA4 AA5
Proizvođač	Schrack


Abmessungen (mm)

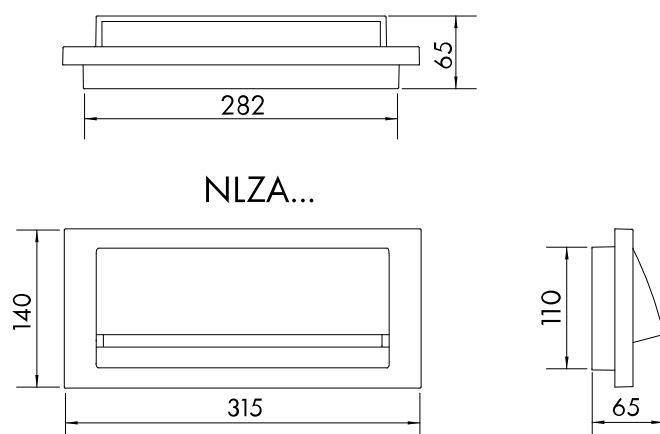

Bohrabstände (mm)

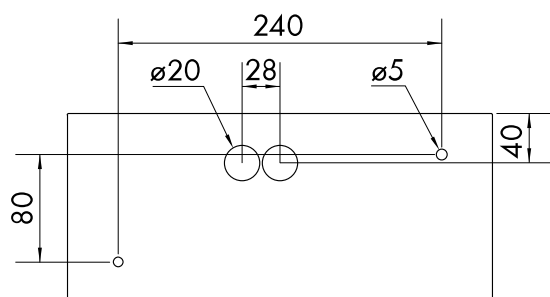

Gehäuse IP54 für COOL-Ausführung (mm)

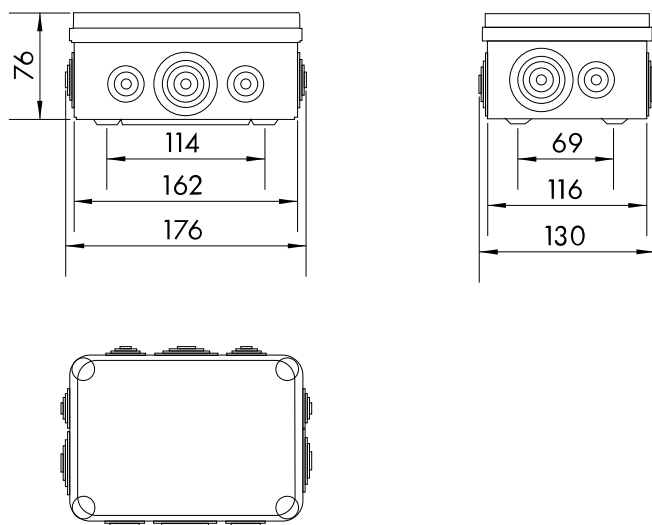

Lista fajlova: Emerg.lum.ZA 4x0,5W HighPower LED 8h 230V AC WirelessConnect

Montagehöhe [m]					
2,00	0,00	2,20	4,12	8,52	3,20
2,50	0,00	2,18	2,59	8,11	1,62
3,00	0,00	2,13	0,54	6,42	0,00
3,50	0,00	1,90	0,21	3,00	0,00
4,00	0,00	0,00	0,00	0,00	0,00

Tabela artikla

OPIS	Kat. broj
Emerg.lum.ZA 4x0,5W HighPower LED 8h 230V AC WirelessConnect Wall surface mounting, with LiFePO4 battery, battery in external housing for mounting outside the cold area, emergency luminaire for illuminating round surfaces, with Bluetooth communication	NLZAAC08WB
Dodatni pribor	
Bat. 3,2V 3,0Ah LiFePO4 za samodrž. LED svet. KSC,KMB i ZAW LiFePO4 baterija, UN3480 - Li-Ion baterije, kompatibilne s aku 3,2V 3,3Ah	NLAKKU3230