

Tehničke karakteristike artikla: NLZAWC03WB

Emerg.lum.ZA 4x0,5W HighPower LED 3h 230V AC WirelessConnect

Wall surface mounting, with LiFePO4 battery, battery in external housing for mounting outside the cold area, emergency luminaire, with Bluetooth communication, 170lm




Tehnički podaci

Neto dužina (mm)	315,00
Neto visina (mm)	140,00
Neto dubina (mm)	65,00
Neto težina (kg)	2,20
Vrsta svetiljke (prema načinu primene)	sigurnosna rasveta
VB-CPS	Sa sopstvenom baterijom
Funkcija	Wireless veza niska temperatura
Verzija	Metalna svetiljka
Dizajn	ZA
Opis boje	bela
Vreme autonomije (h)	3
Izvor svetla	LED (2W)
Lumen	170


Tehnički podaci - nastavak

Opseg napona (V)	230V AC 50Hz ±20%
Baterije (V/Ah)	3,2/3,3 LiFePO4
IP stepen zaštite	IP65
Otpornost na udar	IK08
Način montaže	Montaža na zid
Min. temperatura okoline (°C)	-25
Maks. temperatura okoline (°C)	40
AA Klasa E 8101	AA3 AA4 AA5
Proizvođač	Schrack


Abmessungen (mm)

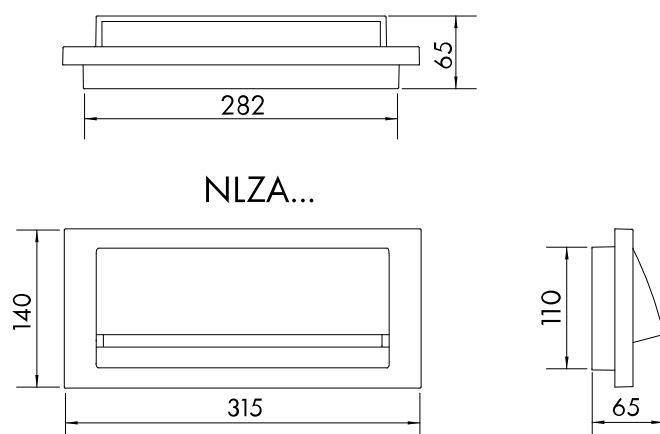

Bohrabstände (mm)

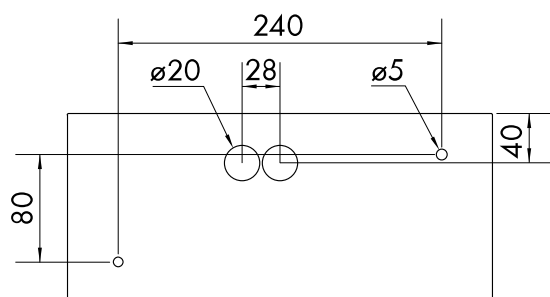

Gehäuse IP54 für COOL-Ausführung (mm)

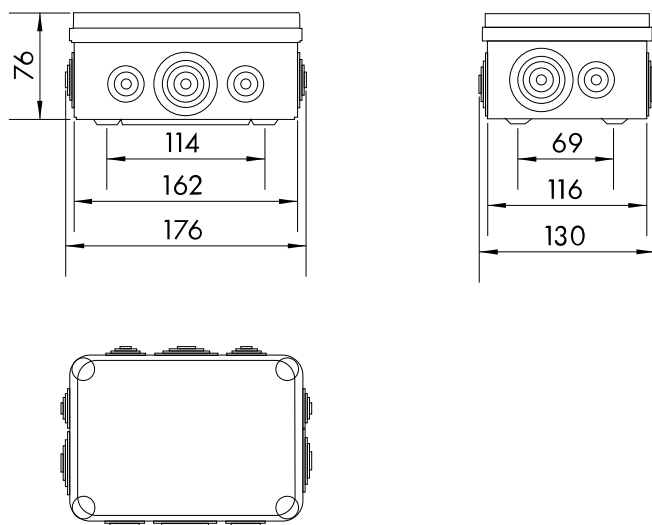

Lista fajlova: Emerg.lum.ZA 4x0,5W HighPower LED 3h 230V AC WirelessConnect

					
2,00	0,21	3,13	0,58	9,43	3,89
2,50	0,18	3,34	0,58	10,51	4,14
3,00	0,16	3,44	0,57	11,28	3,18
3,50	0,11	3,47	0,55	11,3	2,79
4,00	0,03	3,45	0,53	10,71	1,97

Tabela artikla

OPIS	Kat. broj
Emerg.lum.ZA 4x0,5W HighPower LED 3h 230V AC WirelessConnect	
Wall surface mounting, with LiFePO4 battery, battery in external housing for mounting outside the cold area, emergency luminaire, NLZAWC03WB with Bluetooth communication, 170lm	
Dodatni pribor	
Bat. 3,2V 3,0Ah LiFePO4 za samodrž. LED svet. KSC,KMB i ZAW	
LiFePO4 baterija, UN3480 - Li-Ion baterije, kompatibilne s aku 3,2V 3,3Ah	NLAKKU3230