


Tehničke karakteristike artikla: NLZAWT03SC

Sigurnosna svetiljka ZA Autotest LED

1h/3h/8h 230VAC

Cink liveno, belo, IP65, -25° do 40°C, 4 k HP LED 0,5V, sa LiFePO4 baterijom pogodnom za niske temperature, 1h/3h/8h podesivo, montiranje na zid




Tehnički podaci

Neto dužina (mm)	315,00
Neto visina (mm)	140,00
Neto dubina (mm)	65,00
Neto težina (kg)	2,20
Vrsta svetiljke (prema načinu primene)	sigurnosna rasveta
VB-CPS	Sa sopstvenom baterijom
Funkcija	Samokontrola niske temperature
Verzija	Metalna svetiljka
Dizajn	ZA
Opis boje	RAL 9003 (bela)
Izvor svetla	LED (2W)
Lumen	1h: 190;3h: 190;8h: 85
Opseg napona (V)	230V AC 50Hz ±20%


Tehnički podaci - nastavak

Power maintained mode (W)	3,30
Power non-maintained mode (W)	1
Power max. (W)	4,60
Baterije (V/Ah)	3,2V/3,3Ah LiFePO4-TT
IP stepen zaštite	IP65
Otpornost na udar	IK08
Način montaže	Montaža na zid
Min. temperatura okoline (°C)	-25
Maks. temperatura okoline (°C)	40
AA Klasa E 8101	AA3 AA4 AA5
Proizvođač	Schrack

Dimensions (mm)

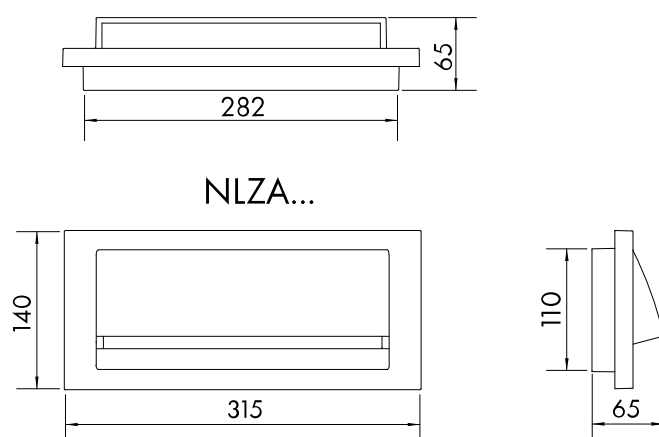

Dimension drilling distances (mm)

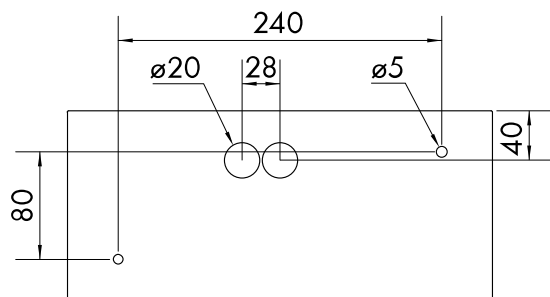

Spacing table - Min. illuminance on the center line +/- 0.5 m: 1 lx - Maintenance factor 0.80 - Autonomy time 1h/3h

					
2,00	0,21	3,13	0,58	9,43	3,89
2,50	0,18	3,34	0,58	10,51	4,14
3,00	0,16	3,44	0,57	11,28	3,18
3,50	0,11	3,47	0,55	11,3	2,79
4,00	0,03	3,45	0,53	10,71	1,97

Tabela artikla

OPIS	Kat. broj
Sigurnosna svetiljka ZA Autotest LED 1h/3h/8h 230VAC Cink liveno, belo, IP65, -25° do 40°C, 4 k HP LED 0,5V, sa LiFePO4 baterijom pogodnom za niske temperature, 1h/3h/8h podesivo, montiranje na zid	NLZAWT03SC
Dodatni pribor	
Accu LiFePO4 3.2V 3.3Ah za LED svetiljku LiFePO4 - Litijum-gvožđe fosfat baterija za niske temperature, UN3480 - UN 3480 : Litijum-jonske baterije, -25° do 40°C	NLAKKU323T