


Tehničke karakteristike artikla: NLZAWT03WL

Sigurnosna svetiljka ZA WL LED 3h 230VAC zidna

Liven cink, bela, IP65, -25° do 40°C, 4 k HP LED 0,5V, sa LiFePO4 baterijom pogodnom za niske temperature, montaža na zid




Tehnički podaci

Neto dužina (mm)	315,00
Neto visina (mm)	140,00
Neto dubina (mm)	65,00
Neto težina (kg)	2,20
Vrsta svetiljke (prema načinu primene)	sigurnosna rasveta
VB-CPS	Sa sopstvenom baterijom
Funkcija	Wireless kontrola niske temperature
Verzija	Metalna svetiljka
Dizajn	ZA
Opis boje	bela
Vreme autonomije (h)	3
Izvor svetla	LED (2W)
Lumen	190


Tehnički podaci - nastavak

Opseg napona (V)	230V AC 50Hz ±20%
Power maintained mode (W)	3,90
Power non-maintained mode (W)	1,50
Power max. (W)	5,30
Baterije (V/Ah)	3,2V/3,3Ah LiFePO4-TT
IP stepen zaštite	IP65
Otpornost na udar	IK08
Način montaže	Montaža na zid
Min. temperatura okoline (°C)	-25
Maks. temperatura okoline (°C)	40
AA Klasa E 8101	AA3 AA4 AA5
Proizvođač	Schrack

Dimensions (mm)

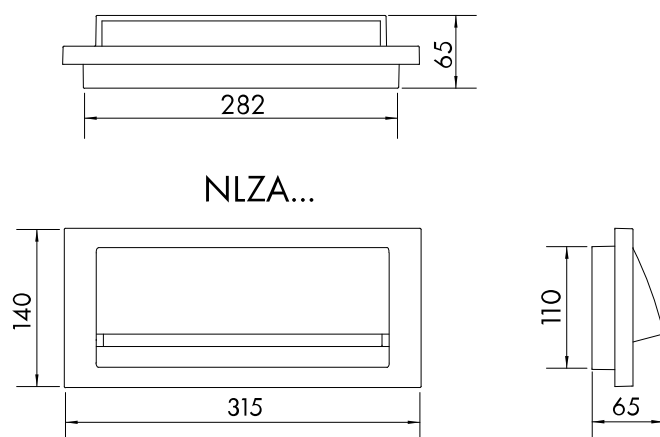

Drilling distances (mm)

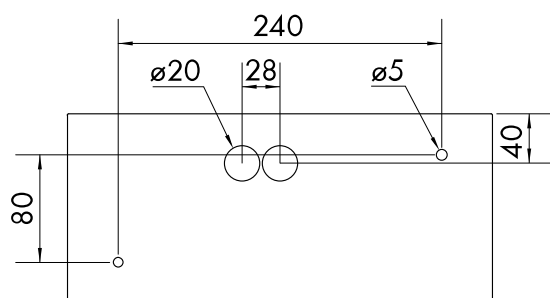

Spacing table - Min. illuminance on the center line +/- 0.5 m: 1 lx - Maintenance factor 0.80 - autonomy time 3h

					
2,00	0,21	3,13	0,58	9,43	3,89
2,50	0,18	3,34	0,58	10,51	4,14
3,00	0,16	3,44	0,57	11,28	3,18
3,50	0,11	3,47	0,55	11,3	2,79
4,00	0,03	3,45	0,53	10,71	1,97

Tabela artikla

OPIS	Kat. broj
Sigurnosna svetiljka ZA WL LED 3h 230VAC zidna Liven cink, bela, IP65, -25° do 40°C, 4 k HP LED 0,5V, sa LiFePO4 baterijom pogodnom za niske temperature, montaža na zid	NLZAWT03WL
Dodatni pribor	
Accu LiFePO4 3.2V 3.3Ah za LED svetiljku LiFePO4 - Litijum-gvožđe fosfat baterija za niske temperature, UN3480 - UN 3480 : Litijum-jonske baterije, -25° do 40°C	NLAKKU323T