


Tehničke karakteristike artikla: NLZAWT08WB

# Emerg.lum.ZA 4x0,5W HighPower LED 8h 230V AC WirelessConnect

Zinc die-cast, white, IP65, -25° up to 40°C, with LiFePO4 battery suitable for low temperatures, emergency luminaire, wall mounting, with Bluetooth communication, 85lm




## Tehnički podaci

|                                        |                                 |
|----------------------------------------|---------------------------------|
| Neto dužina (mm)                       | 315,00                          |
| Neto visina (mm)                       | 140,00                          |
| Neto dubina (mm)                       | 65,00                           |
| Neto težina (kg)                       | 2,20                            |
| Vrsta svetiljke (prema načinu primene) | sigurnosna rasveta              |
| VB-CPS                                 | Sa sopstvenom baterijom         |
| Funkcija                               | Wireless veza niska temperatura |
| Verzija                                | Metalna svetiljka               |
| Dizajn                                 | ZA                              |
| Opis boje                              | RAL 9003 (bela)                 |
| Vreme autonomije (h)                   | 8                               |
| Izvor svetla                           | LED (2W)                        |
| Lumen                                  | 85                              |


## Tehnički podaci - nastavak

|                                |                       |
|--------------------------------|-----------------------|
| Opseg napona (V)               | 230V AC 50Hz ±20%     |
| Power maintained mode (W)      | 3,90                  |
| Power non-maintained mode (W)  | 1,50                  |
| Power max. (W)                 | 5,30                  |
| Baterije (V/Ah)                | 3,2V/3,3Ah LiFePO4-TT |
| IP stepen zaštite              | IP65                  |
| Otpornost na udar              | IK08                  |
| Način montaže                  | Montaža na zid        |
| Min. temperatura okoline (°C)  | -25                   |
| Maks. temperatura okoline (°C) | 40                    |
| AA Klasa E 8101                | AA3<br>AA4<br>AA5     |
| Proizvođač                     | Schrack               |

## Abmessungen (mm)

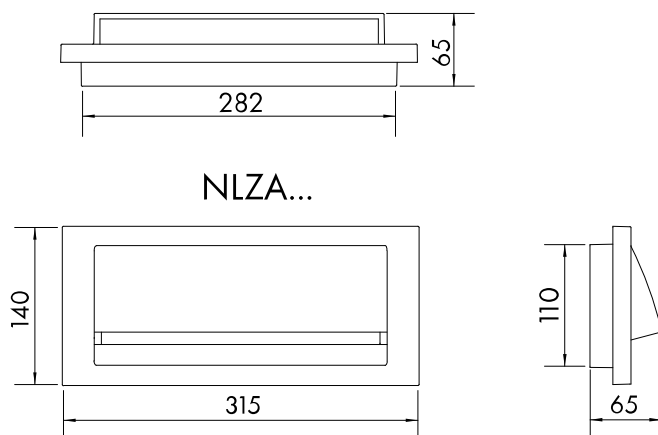

## Bohrabstände (mm)

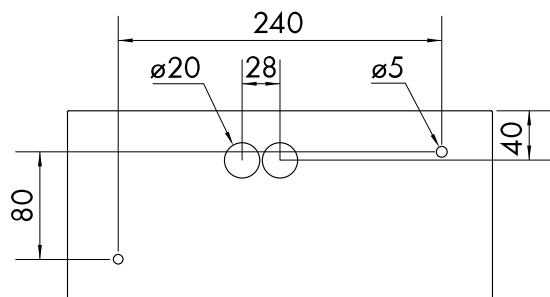

## Abstandstabelle - Min. Beleuchtungsstärke auf der Mittellinie +/- 0,5m: 1lx - Wartungsfaktor 0,80, 8h Autonomiezeit

|  |  |  |  |  |  |
|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|
| 2,00                                                                              | 0,11                                                                              | 2,3                                                                               | 0,56                                                                              | 7,51                                                                                | 2,07                                                                                |
| 2,50                                                                              | 0,05                                                                              | 2,31                                                                              | 0,54                                                                              | 7,16                                                                                | 1,8                                                                                 |

## Tabela artikla

| OPIS                                                                                                                                                                                                                                    | Kat. broj  |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------|
| Emerg.lum.ZA 4x0,5W HighPower LED 8h 230V AC WirelessConnect<br>Zinc die-cast, white, IP65, -25° up to 40°C, with LiFePO4 battery suitable for low temperatures, emergency luminaire, wall mounting, with Bluetooth communication, 85lm | NLZAWT08WB |
| <b>Dodatni pribor</b>                                                                                                                                                                                                                   |            |
| Accu LiFePO4 3.2V 3.3Ah za LED svetiljku<br>LiFePO4 - Litijum-gvožđe fosfat baterija za niske temperature, UN3480 - UN 3480 : Litijum-jonske baterije, -25° do 40°C                                                                     | NLAKKU323T |