

Tehničke karakteristike artikla: RPS42730--

PCB Relej, 2 CO, 8A, 230VAC, serije RPS, raster 5mm

PCB Relej, 2 CO, 8A, 230VAC, serije RPS, raster 5mm, S-Relej



Tehnički podaci

Min. temperatura okoline (°C)	-40
Maks. temperatura okoline (°C)	85
Kontakti	2 CO
Nazivna struja [Omski teret] (A)	8
Nazivni napon [Omski teret]	250VAC
Snaga uklapanja (Omsko opterećenje)	2000VA
Kontaktni materijal	AgNi
Početni kontaktni otpor (Ohm)	≤100mΩ (1A 6VDC)
Električni životni vek (životni ciklus)	50000
Mehanički životni vek	10000000 Operating cycles
Otpornost izolacije (MΩ*km)	1000MΩ (500VDC)
Početni probojni napon	
Između otvorenih kontakata	1000VAC 1min
Između susednih kontakata	2500VAC 1min
Između kontakata i špulne	5000VAC 1min
Vlažnost vazduha (%)	5% - 85% RH
Otpornost na vibracije	10Hz - 150Hz 10g/5g

Tehnički podaci - nastavak


Podaci o špulni

Nazivni napon	230V-AC
Otpor špulne	32500Ω
Neto težina (kg)	0,01
Gubitak snage (W)	0,40


Lista fajlova: PCB Relej, 2 CO, 8A, 230VAC, serije RPS, raster 5mm

Nennspannung	24VDC	24VAC	230VAC
Spulenwiderstand (±10%)	1440Ω	350Ω	32500Ω
Anzugsspannung	16,80VDC	18,00VAC	172,50VAC
Abfallspannung	2,4VDC	3,60VAC	34,50VAC


Dimenzija: PCB Relej, 2 CO, 8A, 230VAC, serije RPS, raster 5mm

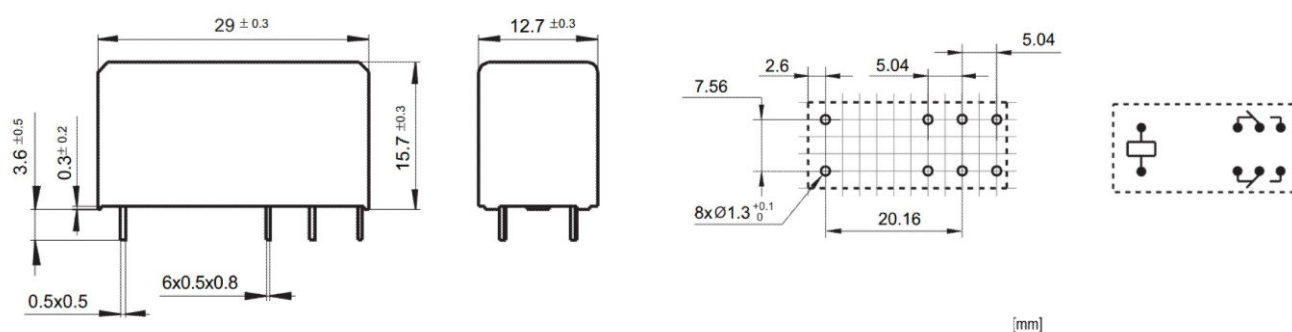

Electrical Durability - resistive load 1) Operations 2) Breaking Capacity

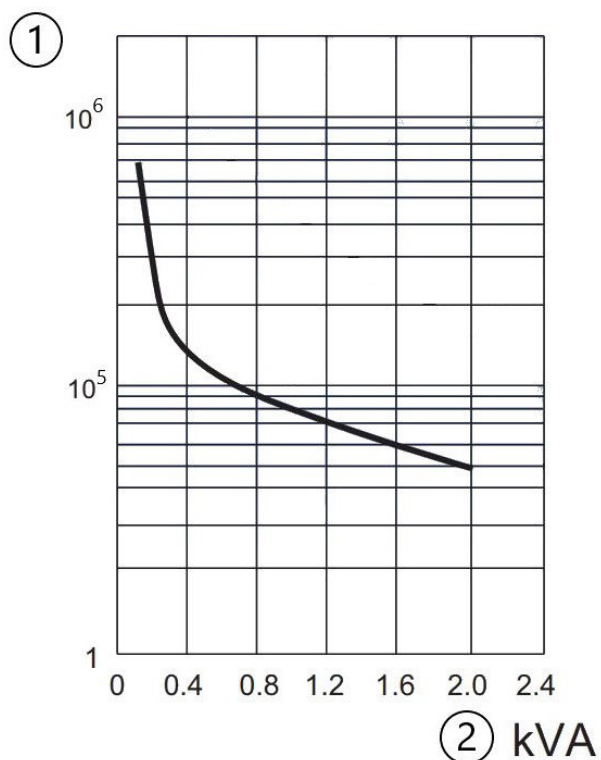

Coil operating range AC 1) coil voltage 2) ambient temperature 3) recommended voltage

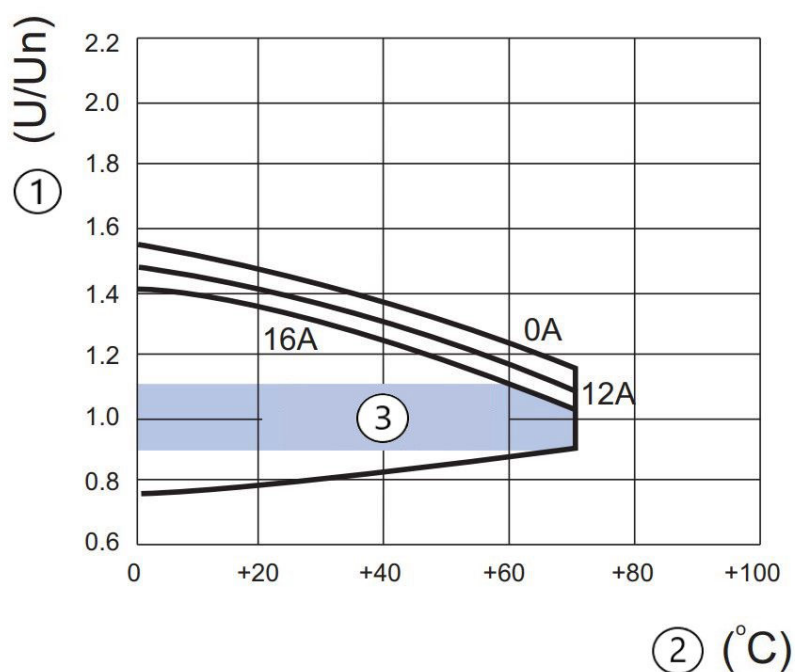

Maximum Switching Capacity - resistive load

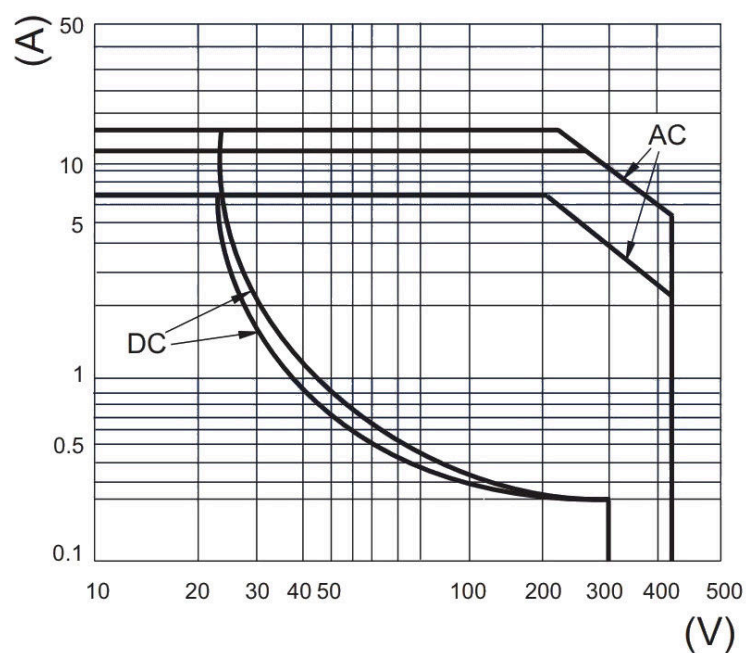


Tabela artikla

OPIS	Kat. broj
PCB Releji, 2 CO, 8A, 230VAC, serije RPS, raster 5mm	RPS42730
PCB Releji, 2 CO, 8A, 230VAC, serije RPS, raster 5mm, S-Releji	
Dodatni pribor	
Podnožje RTS za XT/RT rele,5mm,na vijak montaža na DIN šinu	YRTS0626
podnožje bele boje za XT, RT2x, RT3x, RT4x releje	