


Tehničke karakteristike artikla: SR1D24281S

SORAX Ventilated Door, W=800xH=2.000mm, RAL7035

Opening angle of the door 180° (aligned), compatible for mounting a TANlock3 or TANlock1 swivelling lever

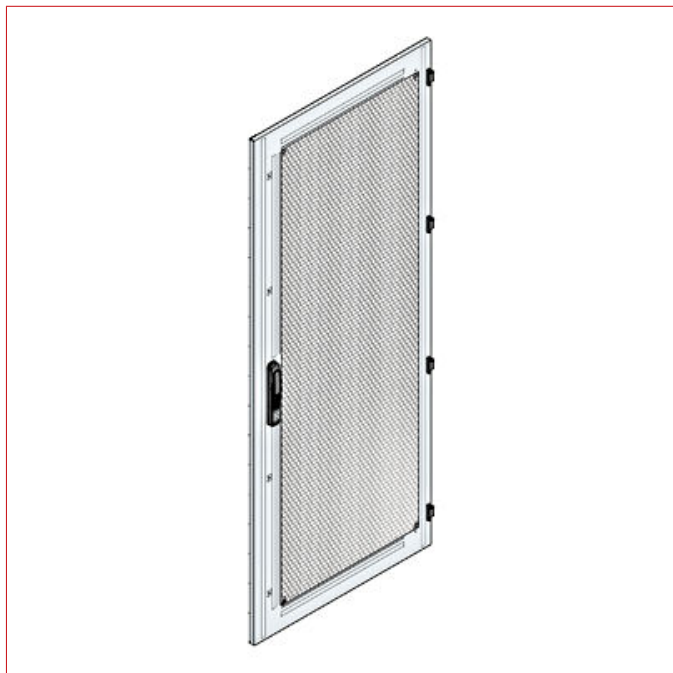

Detalji artikla

- Ventilated door/ventilated (80% air flow)
- swivelling lever
- with rod lock
- Three-point locking
- door opening angle 180°
- optional right-hand or left-hand stop (Door hinge on the right as standard)
- compatible for mounting a TANlock swivelling lever
- incl. fastening device for neat cable routing
- RAL7035


Tehnički podaci

Neto širina (mm)	800,00
Neto visina (mm)	2.000,00
Neto dubina (mm)	25,00
EAN	9004840997217

Tehnički podaci - nastavak

Cena bez PDV-a	28.280,00
Opis boje	RAL 7035
Tip artikla	Ventilated steel sheet door

Dimenzija: SORAX Ventilated Door, W=800xH=2.000mm, RAL7035

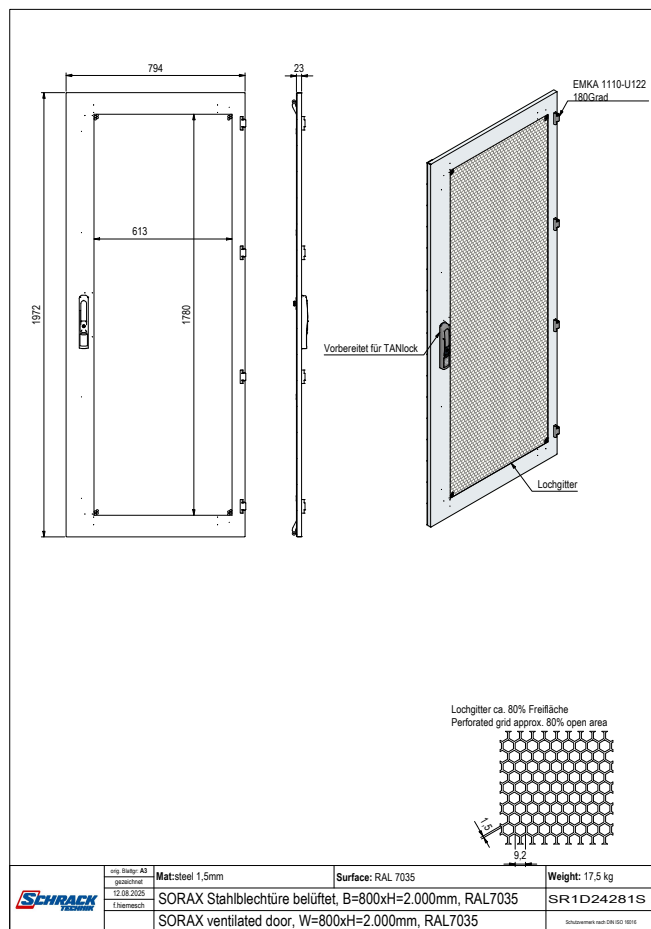

OPIS	Kat. broj
SORAX Ventilated Door, W=800xH=2.000mm, RAL7035	SR1D24281S
Opening angle of the door 180° (aligned), compatible for mounting a TANlock3 or TANlock1 swivelling lever	