

Tehničke karakteristike artikla: SR1D24282S

## SORAX Ventilated Door, W=800xH=2.000mm, RAL9005

Opening angle of the door 180° (aligned), compatible for mounting a TANlock3 or TANlock1 swivelling lever



### Detalji artikla

- Ventilated door/ventilated (80% air flow)
- swivelling lever
- with rod lock
- Three-point locking
- door opening angle 180°
- optional right-hand or left-hand stop (Door hinge on the right as standard)
- compatible for mounting a TANlock swivelling lever
- incl. fastening device for neat cable routing
- RAL9005


### Tehnički podaci

|                  |               |
|------------------|---------------|
| Neto širina (mm) | 800,00        |
| Neto visina (mm) | 2.000,00      |
| Neto dubina (mm) | 25,00         |
| EAN              | 9004840999112 |

## Tehnički podaci - nastavak

|                |                             |
|----------------|-----------------------------|
| Cena bez PDV-a | 28.280,00                   |
| Opis boje      | RAL 9005                    |
| Tip artikla    | Ventilated steel sheet door |

## Dimenzija: SORAX Ventilated Door, W=800xH=2.000mm, RAL9005

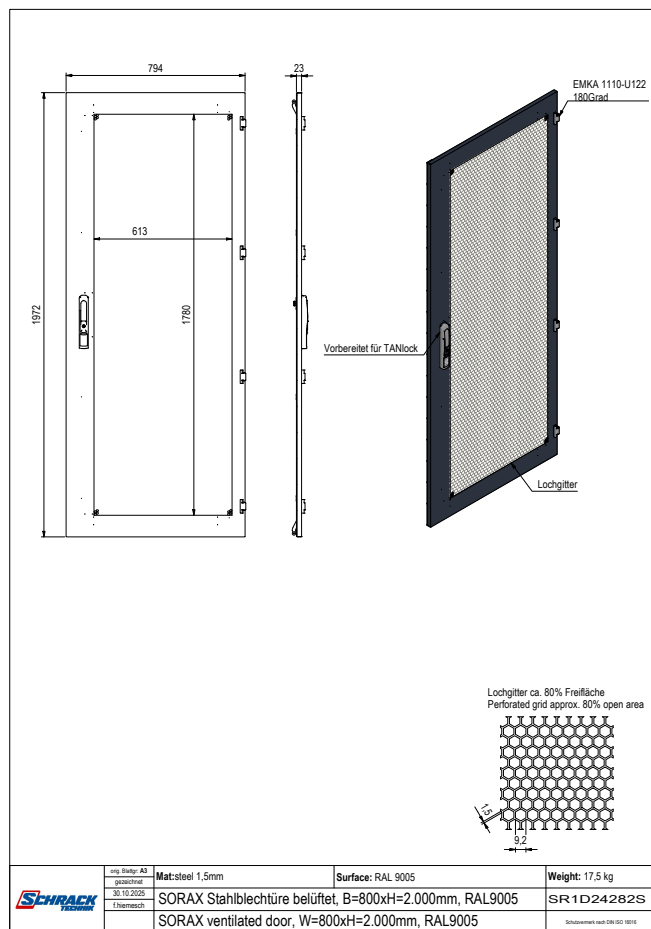

| OPIS                                                                                                      | Kat. broj  |
|-----------------------------------------------------------------------------------------------------------|------------|
| SORAX Ventilated Door, W=800xH=2.000mm, RAL9005                                                           | SR1D24282S |
| Opening angle of the door 180° (aligned), compatible for mounting a TANlock3 or TANlock1 swivelling lever |            |