


Tehničke karakteristike artikla: WSAIE4030R

Ugradivi profil za WSA, 2r, svaki 11MW, za V=400 Š=300mm

zakretni, pogodan za WSA4030150 i WSA4030210

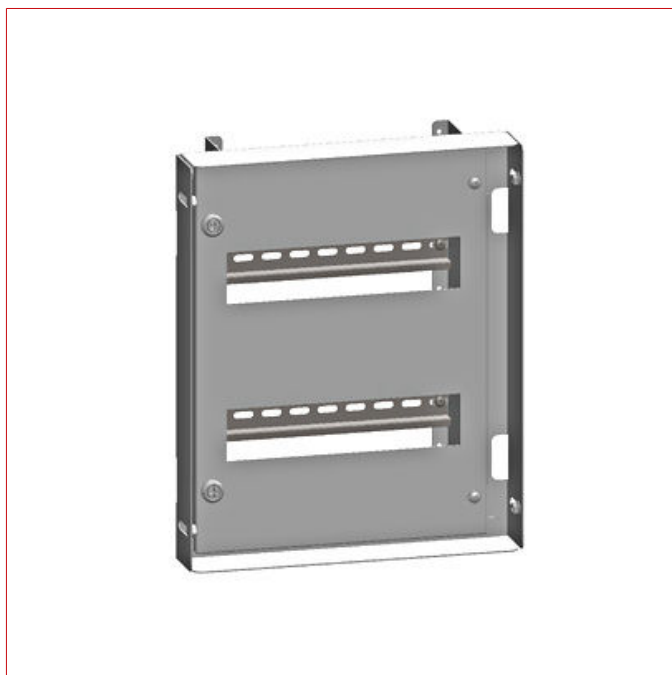

SCHRACK-Info

- For installation of modular devices on DIN-rails
- The distance between the DIN-rails (centre-centre) is 140mm
- The usable depth between the front cover of the WSAIE modular chassis and the WSA enclosure door is 82.5mm
- Material thickness: 1.2mm
- Degree of protection: IP3XD according to IEC 60529
- Color: RAL 7035 (Light grey)
- Supply includes:
 - 1 Piece of front door with 45mm cutouts
 - 2 Pieces of vertical profiles
 - 2 Pieces of closures (top/bottom)
 - DIN-rails
 - Mounting material

Tehnički podaci

Neto širina (mm)	300,00
Neto visina (mm)	400,00
Neto dubina (mm)	61,00

Tehnički podaci - nastavak

Neto težina (kg)	2,60
Opis boje	RAL 7035 (svetlo siva)

Dimenzija: Ugradivi profil za WSA, 2r, svaki 11MW, za V=400 Š=300mm

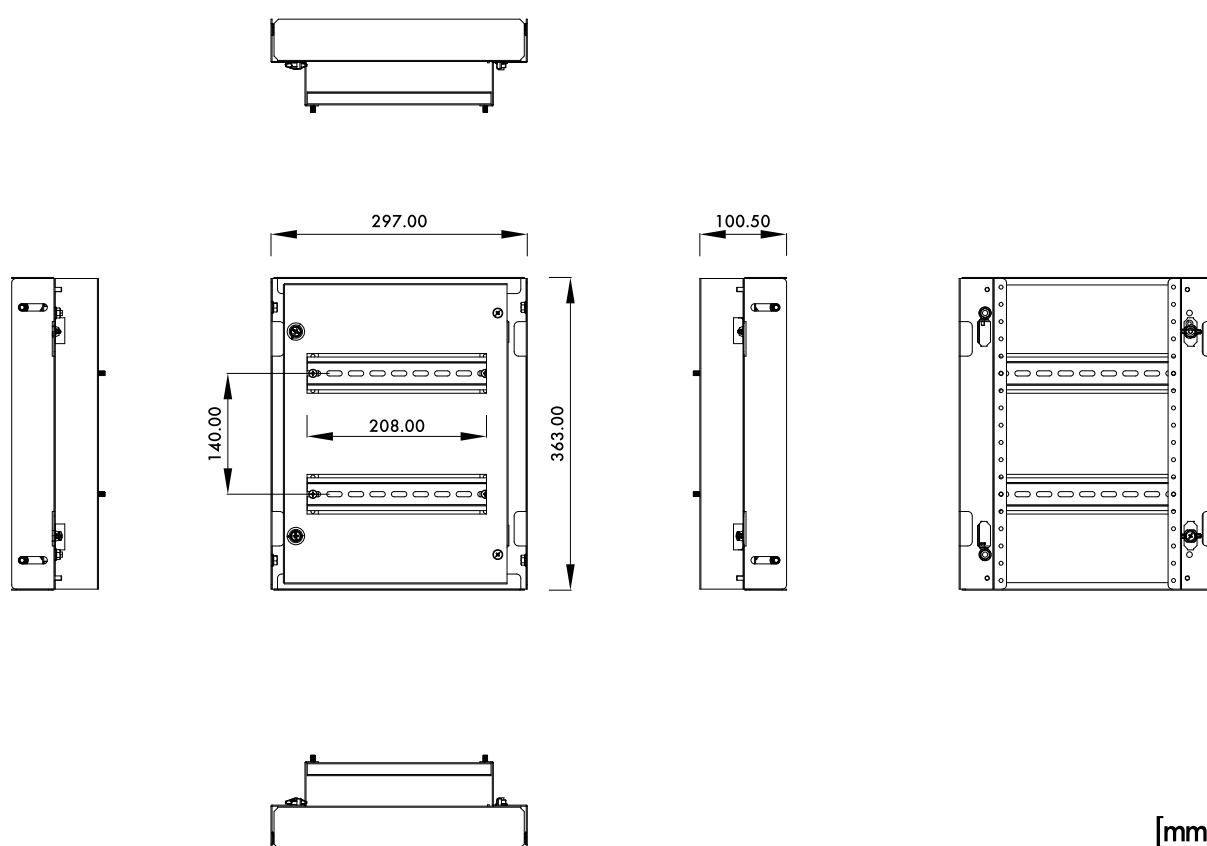


Tabela artikla

OPIS	Kat. broj
Ugradivi profil za WSA, 2r, svaki 11 MW, za V=400 Š=300mm zakretni, pogodan za WSA4030150 i WSA4030210	WSAIE4030R
Dodatni pribor	
Plastična brava sa četvrtinom okretaja za WSAIExxxxR	WSAIE00BL