

Tehničke karakteristike artikla: WST1410302

Nazidni metalni orman, 2 vrata, IP54, 1400x1000x300 mm

čelični lim, RAL7035, s pocinčanom montažnom pločom, brava s zakretnom ručicom, zaključavanje u 3 točke, 2x prirubnica 409x96mm (ŠxD)



SCHRACK info

- Material: Solid, cross-shaped construction, which is folded and welded from a cold-pressed sheet steel plate regardless of the size of the enclosure.
- The enclosure consists of two parts: Body and door.
- Gland plates: 1.4mm powder coated sheet steel. The body front of the enclosure is a double-edged rain gutter to allow water to drain. The enclosure can be rotated by 180°, so the cable entry is possible via gland plate openings in the base or at the top. 4 wall mounting holes with 8.5mm diameter arranged in the corners of the rear wall. All mounting holes have 20mm edge distance. All parts are pre-treated with iron phosphate, demineralised and protected by an epoxy-polyester powder-structure coating in RAL7035.
- The door is secured by hinges and has an opening angle of 130°. The door is mounted using safety pins and the hinges are hidden. The door hinge can be changed easily from right to left. The doors have a foamed polyurethane seal.
- Mounting plate: Galvanised sheet steel, 2mm, folded on all sides. The mounting plate folded on all sides is mounted on welded M8 bolts on the rear of the enclosure and can be removed for mounting and wiring. The mounting plate is made of 2mm sendzimir galvanized sheet steel to comply with EMC guidelines. It has earthing points to establish a connection to the enclosure body.
- Protection class: Maximum protection for the devices is guaranteed due to the high degree of protection and impact resistance IK10 according to IEC 60529 standards. Corrosion protection for additional drilling should be considered.

- Mounting: The enclosure is mounted to the wall with screws (with plastic washers inside) directly with the rear wall or with a mounting kit (accessory WSTWB004 / WSTWB006), in both cases the IP degree of protection is maintained. The small opening radius of the doors makes it easy to mount enclosures directly next to each other.
- Delivery includes: Complete enclosure with gasket and screws, keys DIN 5mm and mounting plate incl. mounting material. Grounding possibilities are given.



Tehnički podaci

Neto širina (mm)	1.000,00
Neto visina (mm)	1.400,00
Neto dubina (mm)	300,00
Neto težina (kg)	84,56
Min. temperatura okoline (°C)	-20
Maks. temperatura okoline (°C)	70
Tip	Zidni orman od čeličnog lima
Visina (mm)	1400
Širina (mm)	1000
Dubina (mm)	300
Maksimalna opteretivost (kg)	235
Debljina stijenke tijela (mm)	1,50
IP stepen zaštite	IP54
Montažna ploča	Galvanizovani čelični lim 2mm
Opteretivost montažne ploče (kg)	190
Debljina montažne ploče (mm)	2
Visina montažne ploče (mm)	1340
Širina montažne ploče (mm)	940
Broj vrata	2
Opteretivost vrata (kg)	30
Broj prirubnica	2
Debljina stijenke vrata (mm)	2
Ojačanje vrata	Da (sadržano)
Brava	Zakretna ručica
Šarke	6
Tip prirubnice	E
Širina prirubnice (mm)	409
Dubina prirubnice (mm)	96
Pričvršćenje stražnje ploče	6
Opis boje	RAL 7035 (svetlo siva)
Gubitak snage (W)	-604,00
Klasa zaštite	I

Dimenzije

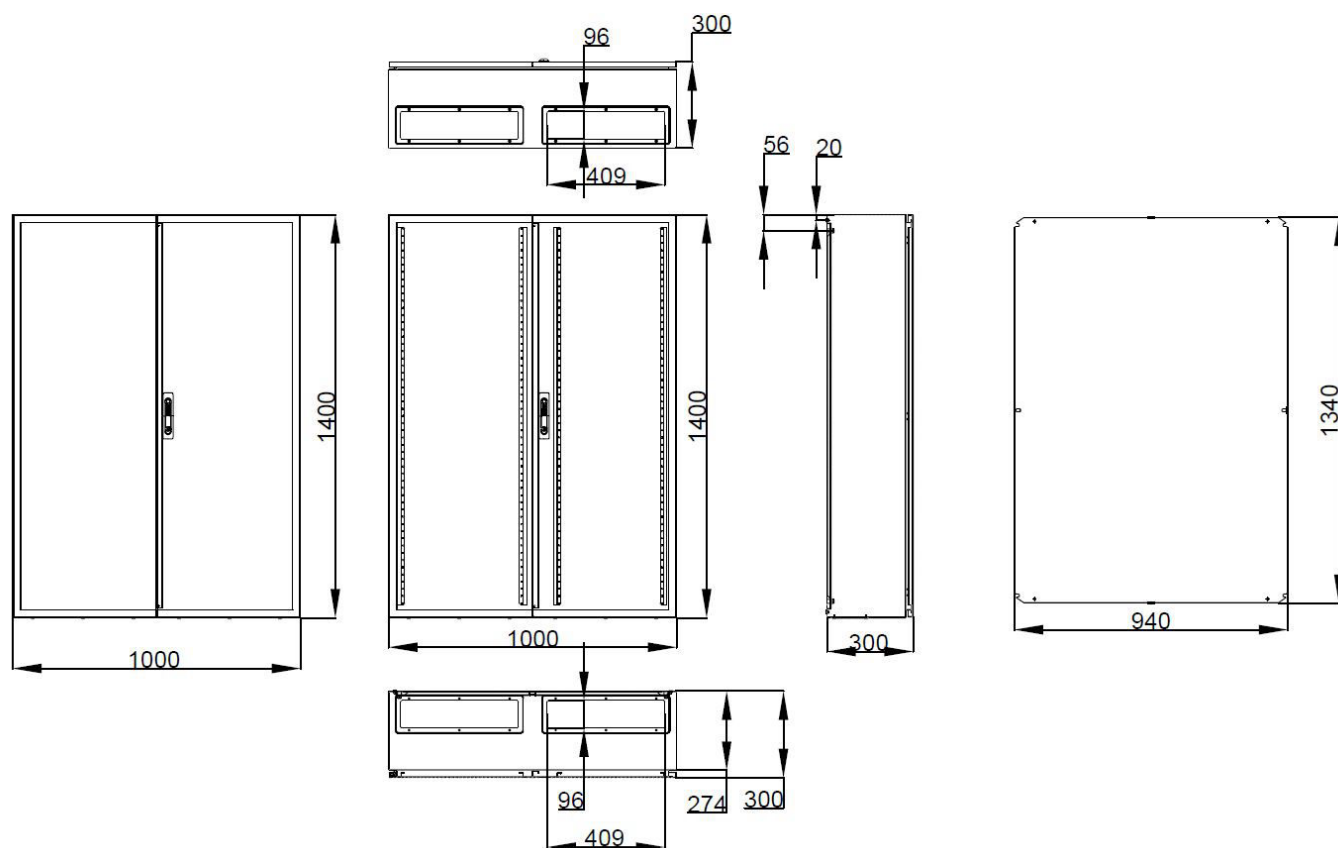


Tabela artikla

OPIS	Kat. broj
Nazidni metalni orman, 2 vrata, IP54, 1400x1000x300 mm čelični lim, RAL7035, s pocinčanom montažnom pločom, brava s zakretnom ručicom, zaključavanje u 3 točke, 2x priрубnica 409x96mm (ŠxD)	WST1410302
Dodatni pribor	
Set(6kom) za montažu WST ormara na zid pakiranje = 6 komada	WSTWB006
Pletenica za uzemljenje ormara dužine 260mm	WSTCUF260
Mini-okretna ručka sa tipkom za WST odgovara za: WST1206300, WST1208300, WST1208400, WST1210302, WST1212302, WST1212402, WST1410302	WSTS3531
Rotirajuća ručica za polucilindar WST ormara, IP65 s pokrovom za polucilindar bravu, crna	IU001225
Ručica za polucilindar 45mm, sa pokrovom IP65	IU001226
Ručica za polucilindar 45mm, sa pokrovom IP65	IU001903
Zakretna ručica 1125-U186	IU001903
Ventilaciona priрубnica za WST ormane V=439 D=126 mm priрубnica tip E	WSTVF002
Kablovska uvodnica za WST sa 9xM16, 4xM20, 1xM25 priрубnica za WST ormare, s otvorima: 9xM16, 4xM20, 1xM25, 409x96mm (ŠxD), poklopci za sve otvore sadržani u isporuci, RAL 7035	WSTFA0E1
Kablovska uvodnica za WST sa 18xM16, 5xM20, 4xM25, 2xM32 priрубnica za WST ormare, s otvorima: 18xM16, 5xM20, 4xM25, 2xM32, 409x96mm (ŠxD), poklopci za sve otvore sadržani u isporuci, RAL 7035	WSTFA0E2
Kablovska uvodnica za WST sa 21xM16, 10xM20 priрубnica za WST ormare, s otvorima: 21xM16, 10xM20, 409x96mm (ŠxD), poklopci za sve otvore sadržani u isporuci, RAL 7035	WSTFA0E3
Adaprer za uvodnik za WST ormane, W=409 D=96 mm tip E, RAL7035	WSTVBF03
Kablovski uvodnici, 28mm, za 6 kablova (1 pak. = 10 kom.) 3x 3,4mm, 3x 5-9mm	WSTCEG2806
Kablovski uvodnici, 40mm, za 10 kablova (1 pak. = 10 kom.) 3x 5-14mm, 7x 2-7mm	WSTCEG4010
Kablovske uvodnice 50mm, 8 perforiranih rupa (1 pak=5kom) kabelski uvodi: 2x 3-7mm, 1x 12-21mm, 1x 7-15mm, 4x 4-10mm	WSTCEG5008
Kablovski uvodnici, 50mm, za 7 kablova (1 pak. = 5 kom.) 7x 6-13mm	WSTCEG5007