

Tehničke karakteristike artikla: YRTS8024--

Podnožje releja za oprugom, 5mm, logični raspored za 24VDC

S-relej, za XT, RT2x, RT3x, RT4x releje, 300VAC, 8A



Schrack-Info

- Relay socket with LED indicator
- Spring terminals - terminal cross-sections from 0.5 mm² to 2.5 mm²
- DIN rail mounted plug-in socket with logical arrangement
- Easy installation and clear circuit labeling


Tehnički podaci

Min. temperatura okoline (°C)	-40
Maks. temperatura okoline (°C)	85
Standard proizvoda	EN 61984
Tip priključka	Opružne stezaljke
Početni probojni napon	
Između susednih kontakata	2000 V/min
Između kontakata i špulne	4000 V/min
Nazivni napon	300VAC
Nazivna struja (A)	8
Upravljački napon DC	6-24 V
Neto težina (kg)	0,03

Tehnički podaci - nastavak

Pun presek (mm ²)	0.5 - 2.5
Fleksibilna žica (mm ²)	0.5 - 2.5
Fleksibilna sa papučicom (mm ²)	0.5 - 2.5

Circuit diagram

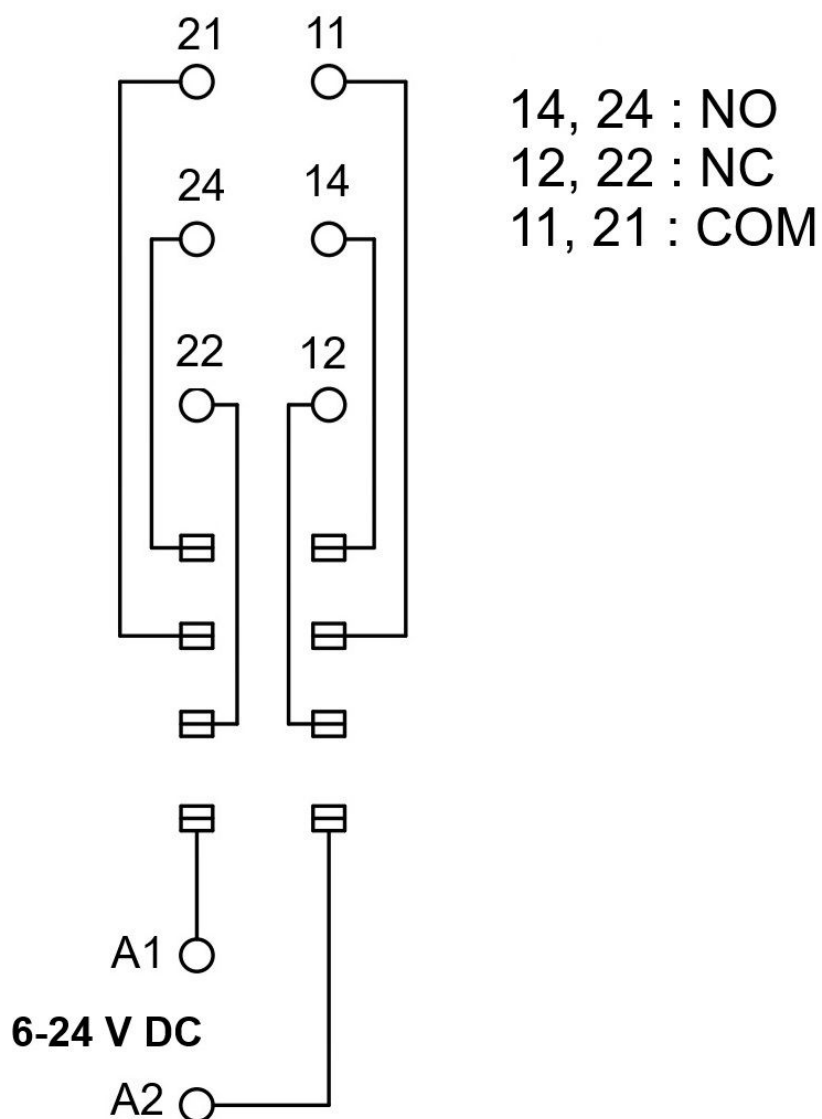

Dimensions

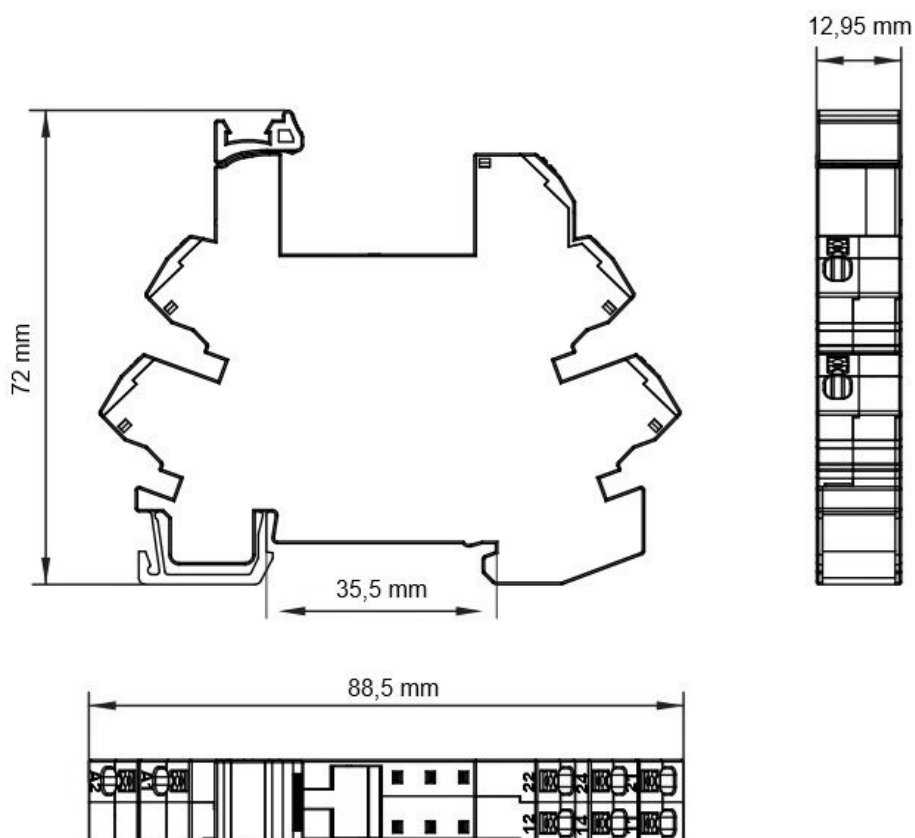


Tabela artikla

OPIS	Kat. broj
Podnožje releja za oprugom, 5mm, logični raspored za 24VDC S-relej, za XT, RT2x, RT3x, RT4x releje, 300VAC, 8A	YRTS8024
Dodatni pribor	
10-polni most za podnožje YRTS8, RT i XT releja S-relej, RT serija	YRTS8000