

Tehničke karakteristike artikla: EV103003--

Dimer uzidni 60-400W/VA, RL

Cover EV102013--



Schrack-Info

Phase angle rotary dimmer with on/off button for resistive or inductive loads. The built-in potentiometer can be used to set a basic brightness, i.e. a constant brightness value which is the same each time the unit is switched on. For completion the dimmer cover EV102013--, EV112013-- or EV122013-- must be used. No neutral conductor is required for the connection.



Tehnički podaci

Serija	VISIO 50
Dizajn	CLASSIC
Tip artikla	Dimer
Dimmertyp	Dimer sa odsecanjem zadnje ivice napona
Tip punjenja	Ohmic Inductive
Dimmable illuminants	Low voltage halogen lamp with conventional transformer Incandescent lamp High voltage halogen lamp
Opseg snage	60-400 W/VA
Nazivni napon AC (V)	230

Tehnički podaci - nastavak


Način ugradnje	Screws and claws
Način pričvršćenja	Flush-mounted
Operating temperature	0°C to +35°C
Safety function	Short-circuit protection Reversible electronic overload protection
IP stepen zaštite	IP20
Tip priključka	Kleme sa šrafovm
Priključne stezaljke	U skladu s EN 60669-1
Priključni vodič	Fleksibilni s kablskim završetkom (tuljak) Kruti Fleksibilni
Presjek priključnog vodiča (mm²)	1,5 und 2,5
Materijal	ABS Pocinkovani čelik
Okruženje	Halogen free
Održivost	ROHS
Ispitna oznaka	VDE
Dimenzije (mm)	70x70x40
Ugradna dubina (mm)	35

Dimmleistung

							
Min.	60 W	60 W	60 VA	-	-	-	-
Max.	400 W	400 W	400 VA	-	-	-	-

- 1 ... Glühlampe
 2 ... Halogenlampe
 3 ... konventioneller Transformator
 4 ... elektronischer Transformator
 5 ... dimmbare Energiesparlampe CFL
 6 ... dimmbare 230V LED-Lampe
 7 ... dimmbare 12V LED-Lampe

Anschlussplan

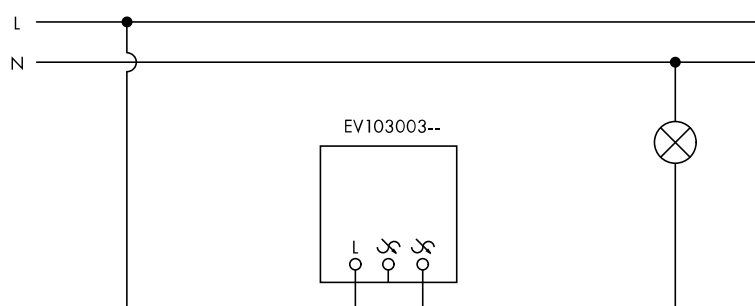

Abmessungen (mm)

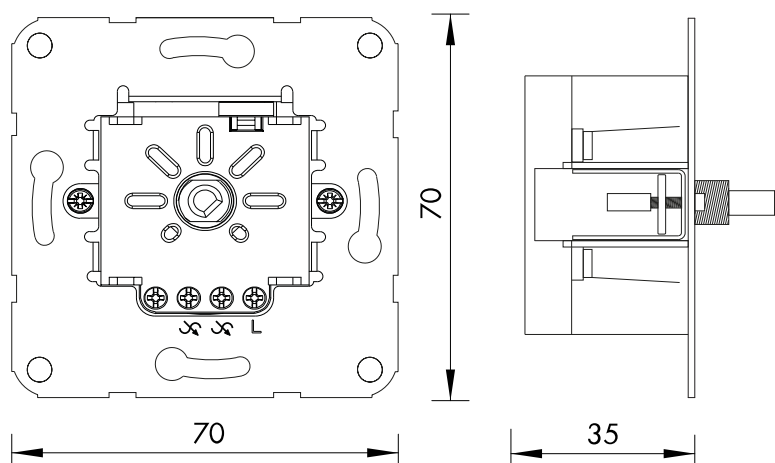


Tabela artikla

OPIS	Kat. broj
Dimer uzidni 60-400W/VA, RL	EV103003
Cover EV102013--	
Dodatni pribor	
Taster za dimer, beli	EV102013
Pokrov za dimer, antracit	EV112013
Taster za dimovanje, srebrni	EV122013