


Tehničke karakteristike artikla: LIPK0002--

Maia LED Round 330 30W/24W 3K/4K IP54 230V bela

Zidna, plafonska svetiljka sa podesivom snagom i bojom svetla, lumen 30W = 3000lm /
24W = 2400lm



Kriva prostiranja svetla

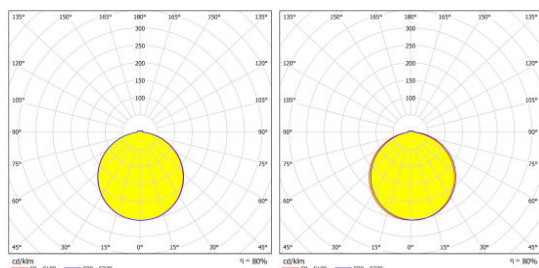

Detalji artikla

The MAIA LED Round 330 is a practical, cost-effective luminaire, ideal for stairwells and corridors. It provides reliable lighting with adjustable wattage (24W, 30W) and color temperature (3000K/4000K). The simple, functional design ensures broad, even light distribution.




Tehnički podaci

Neto visina (mm)	48,00
Neto prečnik (mm)	330,00
Neto težina (kg)	1,10
Min. temperatura okoline (°C)	-10
Maks. temperatura okoline (°C)	30
Vrsta svetiljke (prema načinu primene)	Zidne nadgradne svetiljke Plafonska svetiljka nadgradna
Način montaže	Plafonska nadgradna Montaža na zid
Opis boje	bela
Materijal	PC
Ugao emisije (°)	120
Nazivni napon AC (V)	220 - 240
Sijalično grlo	LED štampana ploča
Sistemska efikasnost (lm/W)	100
Snaga (W)	24;30
Boja svetla	Neutralno bela Toplo bela
Temperatura boje (K)	3000, 4000
Indeks reprodukcije boje	≥80
Stabilnost boje MacAdam (sdcm)	<6
Svetlosni flux (lm)	2400 3000
Životni vek	30.000h (L70/B50)
Dimabilno	Ne
Klasa zaštite	II
IP stepen zaštite	IP54

Tehnički podaci - nastavak

Klasa energetske efikasnosti	F
IK stepen zaštite	IK06
Sijalica uključena	Da
Prečnik (mm)	330
ØxV mm	330x48
Broj svetiljki po osiguraču B10	12
Broj svetiljki po osiguraču B13	14
Broj svetiljki po osiguraču B16	18
Broj svetiljki po osiguraču B20	24
Broj svetiljki po osiguraču B25	30
Broj svetiljki po osiguraču C10	18
Broj svetiljki po osiguraču C13	24
Broj svetiljki po osiguraču C16	29
Broj svetiljki po osiguraču C20	36
Broj svetiljki po osiguraču C25	45

Dimenzija: Maia LED Round 330 30W/24W 3K/4K IP54 230V bela

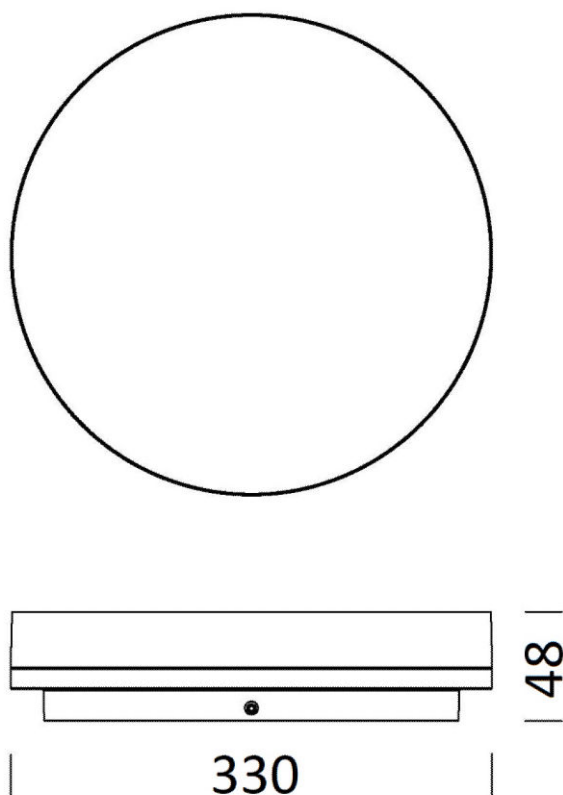

OPIS

Kat. broj

Maia LED Round 330 30W/24W 3K/4K IP54 230V bela

LIPK0002

Zidna, plafonska svetiljka sa podesivom snagom i bojom svetla, lumen 30W = 3000lm / 24W = 2400lm