


Tehničke karakteristike artikla: HDCR100249

IS-1 vertikalni ranžir kabla 41U, RAL7035 svetlosivi

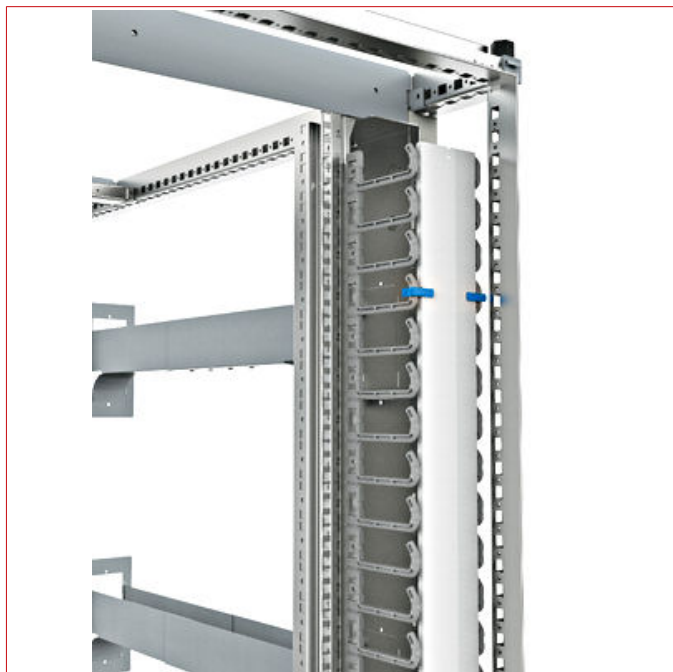

SCHRACK-Info

IS-1 cable manager, vert. 41U R7035 packed

Cabinet height: 2,000 mm

Dimensions of extension bracket: 90 x 112 mm (W x D)

Inside depth of the cable finger: 78 mm

Material/finish Channel: Sheet steel, powder-coated

Material of finger/clips: PC+ABS FR40

Fire behaviour: halogen-free; UL 94 V-0

Channel colour: RAL 7035 Light grey

Finger colour: RAL 9005 Jet black

Vertical cable manager for structured cable routing

in IS-1 cabinets. Large channel for storing excess lengths. Rounded 1U cable finger for safe guidance of fibre optic cables. Four cable entries each at the side and rear (knockout). Detachable, divided cap for closing the manager.

Note: Only for racks B700 (asymmetrical) and B800.

Comprising:

1 Vertical cable manager

17 Cable finger, 5x

2 Cap

Fitting material

Delivery condition: packed

Tehnički podaci

Neto širina (mm)	90,00
Neto visina (mm)	2.200,00
Neto dubina (mm)	112,00
Neto težina (kg)	9,50
Min. temperatura okoline (°C)	-10
Maks. temperatura okoline (°C)	60

OPIS	Kat. broj
IS-1 vertikalni ranžir kabla 41 U, RAL7035 svetlosivi	HDCR100249