

Tehničke karakteristike artikla: NL93030004

Panik svet. otpo. na eksploz.EXIT zone2/22 LED 3h 230 VAC

transparent cover without pictogram, wall surface mounting, IP66, 106lm




Tehnički podaci

Neto dužina (mm)	356,00
Neto visina (mm)	175,00
Neto dubina (mm)	76,00
Neto težina (kg)	2,50
Vrsta svetiljke (prema načinu primene)	sigurnosna rasveta
VB-CPS	Sa sopstvenom baterijom
Funkcija	samokontrola
Verzija	EX sigurnosna rasveta
Dizajn	EXIT
Opis boje	sivo
Vreme autonomije (h)	3
Izvor svetla	LED (3W)
Lumen	106
Opseg napona (V)	110-277V AC; 110-250V DC
Baterije (V/Ah)	2x6/0,8 NiCd
IP stepen zaštite	IP66
Način montaže	Montaža na zid
Min. temperatura okoline (°C)	5
Maks. temperatura okoline (°C)	35
Proizvođač	Cooper Crouse-Hinds

Dimensions (mm)

NL9...

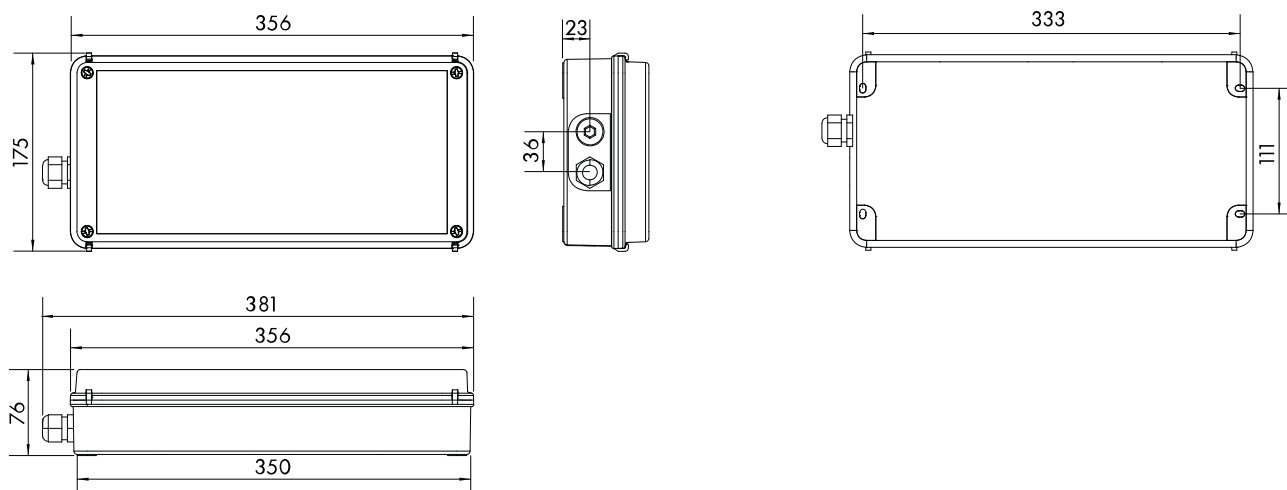

Distance table - min. illumination at the middle line: 1lx - maintenance factor 0,80

Montagehöhe [m]					
2,00	2,38	6,37	6,19	5,98	2,38
2,50	2,41	6,9	6,67	6,51	2,41
3,00	2,26	6,98	6,92	6,86	2,43
3,50	2,19	6,89	6,87	7,04	2,27
4,00	2,13	6,48	6,75	7,03	2,04

OPIS

Kat. broj

Panik svet. otpo. na eksploz.EXIT zone2/22 LED 3h 230 VAC
transparent cover without pictogram, wall surface mounting, IP66, 106lm

NL93030004