

Tehničke karakteristike artikla: NLDER029EL

Protiv - panična svetiljka DER 3x1W ERT-LED

ugradna montaža


with supervision - centrally switchable



Tehnički podaci

Vrsta svetiljke (prema načinu primene)	sigurnosna rasveta
VB-CPS	Za centralni panik uređaj (CPS)
Funkcija	S nadzorom - centralno ON/OFF
Verzija	Metalna svetiljka
Dizajn	DER
Opis boje	bela
Izvor svetla	ERT-LED (3W)
Lumen	300
Područje napona (V)	230V AC 50Hz ±20%; 230V DC ±20%
IP stepen zaštite	IP40
Način montaže	Plafonska ugradna
Min. temperatura okoline (°C)	-5
Maks. temperatura okoline (°C)	40
AA Klasa E 8101	AA4
Proizvođač	Schrack

Dimensions (mm)

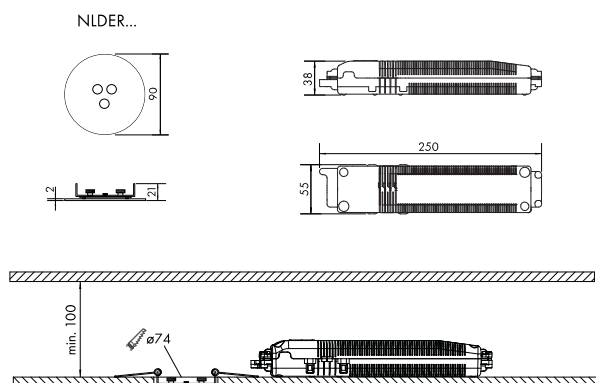

Distance table - min. illumination at the middle line: 1lx - maintenance factor 0,80

Montagehöhe [m]					
2	3,93	10,98	11,17	10,99	3,76
2,5	3,57	11,21	11,21	11,10	3,44
3	2,61	11,10	11,01	10,93	2,52
3,5	1,56	10,11	10,06	9,89	1,00
4	0,00	7,83	8,35	8,24	0,00

Tabela artikla

OPIS	Kat. broj
Protiv - panična svetiljka DER 3x1W ERT-LED ugradna montaža with supervision - centrally switchable	NLDER029EL
Dodatni pribor	
Zaštitna čelična mreža za IL, KI, VI, RI, KT, DAQ, DAR	NLBALL3